




Basic Unmarked
dimensions tolerance
L/D TOL

0.5-6	± 0.1
>6-30	± 0.2
>30-120	± 0.3
>120-400	± 0.5
>400-1000	± 0.8
>1000-2000	± 1.2
>2000-4000	± 2
Round/ Chamfering R/C	Unmarked tolerance TOL
0.5-3	± 0.2
>3-6	± 0.5
>6	± 1.0
Short side length LESS	Unmarked tolerance TOL
>0-10	$\pm f$
>10-50	$\pm 0.5^f$
>50-120	$\pm 0.3^f$
>120-400	$\pm 0.15^f$
>400	$\pm 0.1^f$

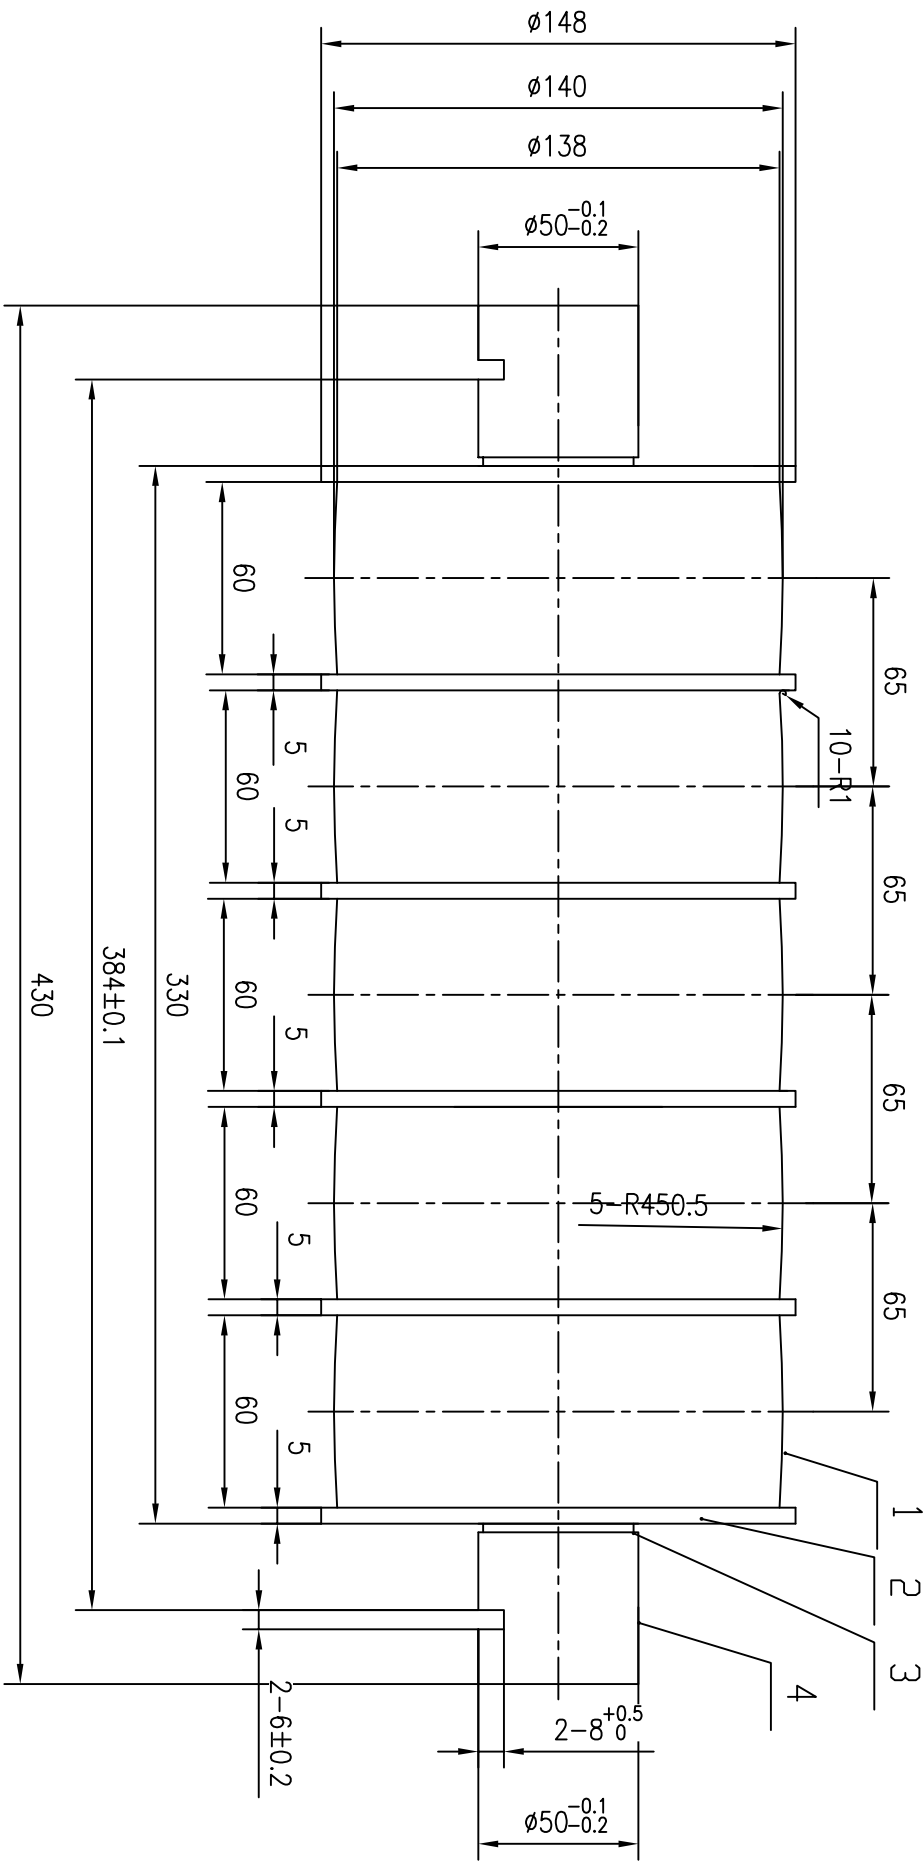

4	A328328001	Deflection Sheave shaft	1	40Cr	
3	GB/T894.1/50	Elastic retainer for shaft	2		
2	GB/T276/6010	Deep groove ball bearing	6		
1	A328428001	Deflection Sheave	1	40Cr	

Serial number	Generation of no.	Name	Quantity	Materials	Reserve note
---------------	-------------------	------	----------	-----------	--------------

Version No.	Mark	NO.	Change the content	Person in charge	Date	First drawing date	2025.5.15	Part Name	Deflection Sheave	Drawing No	A140128001
A0								Model	CSAG-GSI20	Scale	1: 1
								Total pages	1	Page	1
								Weight			

Signature	Date	Signature	Date
CHK		TFC	
DSG		APPD	

CEG Motor (SUZHOU) Co., LTD
