
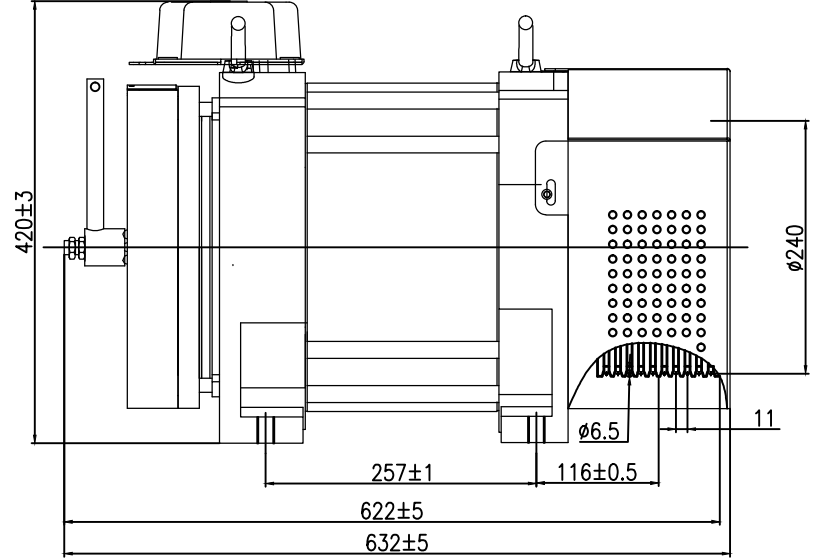
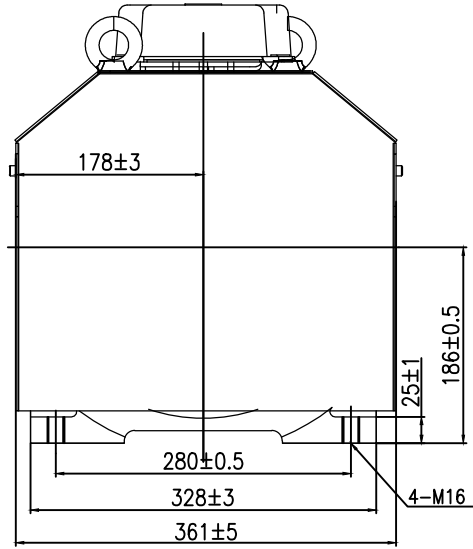


WARNING:
This drawing is the property of CEG Motor (SUZHOU) Co., LTD., and shall not be used in the scope of the company for the purpose of ownership. Without prior written authorization, shall not copy or disclose all and part information. And must be returned in time related information and copy to CEG Motor (SUZHOU) Co., LTD.,

Basic dimensions L/D	Unmarked tolerance TOL
0.5-6	±0.1
>6-30	±0.2
>30-120	±0.3
>120-400	±0.5
>400-1000	±0.8
>1000-2000	±1.2
>2000-4000	±2
Round/ Chamfering R/C	Unmarked tolerance TOL
0.5-3	±0.2
>3-6	±0.5
>6	±1.0
Short side length LESS	Unmarked tolerance TOL
>0-10	±1'
>10-50	±0.5'
>50-120	±0.3'
>120-400	±0.15'
>400	±0.1'



Model	φD	Groove profile	φd	α	β	P
CSAG-D320 (240)	φ240	U	6.5	35°	96°	11

CSAG-D320 (240) (SUSPENSION 2:1) Permanent Magnet Synchronous Gearless Traction Machine

Spec.	Load	Speed	Height	Toque	Sheave Dia.	Rope Dia.	Groove	Distance Between Groove	Power	Rated Voltage	Rated Current	Rated Frequency	Rated Speed
	kg	m/s	m	Nm	mm	mm	pcs	mm	kW	V	A	Hz	rpm
CSAG-D320 (240)-1250-1.0	1250	1	≤50	501	240	6.5	10	11	8.4	380	19.2	32	159
CSAG-D320 (240)-1250-1.6	1250	1.6	≤80	501	240	6.5	10	11	13.4	380	28.5	51	255
CSAG-D320 (240)-1250-1.75	1250	1.75	≤80	501	240	6.5	10	11	14.6	380	28.5	55.8	279

													Part Name	Drawing No
													Outline drawing	A210216001
													Model	Material
													CSAG-D320 (240)-1250kg	Scale
													1: 1	
													Total pages	Page
													1	1
														Weight
A2														
Version No.	Mark	NO.	Change the content		Person in charge	Date	First drawing date	2025.6.25		CEG Motor (SUZHOU) Co., LTD				