

ACB / MCCB / ELCB / ATS MCB / SPD / MS / MMS



Index

A. MCCB/ EMCCB/ ELCB / MCB	P02
B. ATS (MCCB TYPE、 MS TYPE)	P24
C. ACB	P27
D. MCB/ RCBO	P28
E. SPD / TVSS	P31
F. MS	P32
G. MMS	P52

Index

MCCB
ELCB

ATS

ACB








MCB

SPD

MS









MMS

Molded Case Circuit Breaker

Frame size (AF) (Inm)		30		50		60								
Type		BM30-CN	BM30-SN	BM50-CN	BM60-SN	BM60-HN	BM60-HBN							
Appearance														
Rated current In (A) at ambient temp. 40 °C		3, 5, 10, 15, 20, 30.	3, 5, 10, 15, 20, 30.	10, 15, 20, 30, 40, 50.	10, 15, 20, 25, 30, 40, 50, 60.	10, 15, 20, 25, 30, 40, 50, 60.	10, 15, 20, 30, 40, 50, 60.							
Number of poles (P)		2 3	2 3	2 3	2 3 4	2 3 4	3							
Rated insulation voltage Ui (V)	AC	690		690		690		690		800				
	DC	—		—		—		—		—				
Rated operational voltage Ue (V AC)		500		500		500		500		500				
Uimp(kV)		6		6		6		6		8				
Dimensions 	a	45	67.5	50	75	50	75	50	75	100	50	75	100	90
	b	96		130		130		130		130		130		155
	c	52		68		68		68		68		68		68
	ca	67		90		90		90		90		90		90
	bb	84		111		111		111		111		111		132
	aa	23.5		25		25		25		25		25		30
Weight (kg)		0.3	0.4	0.45	0.65	0.45	0.65	0.45	0.65	0.85	0.45	0.65	0.85	1.3
Rated breaking capacity (kA)	IEC 60947-2 EN 60947-2 AC	500V(690V)	—		1.5		1.5		5		7.5		15	
		440V	—		2.5		2.5		7.5		10		25	
		415V	1.5		2.5		2.5		7.5		10		25	
		380V	1.5		2.5		2.5		7.5		15		30	
		220V(240V)	2.5		5		5		10		25		50	
	DC	250V	—		—		—		—		—		—	
		125V	—		—		—		—		—		—	
Connection		Clamp terminal		Clamp terminal		Clamp terminal		Clamp terminal		Clamp terminal		Clamp terminal		
Optional accessories	Alarm switch (AL)	—		○		○		○		○		○		
	Auxiliary switch (AX)	—		○		○		○		○		○		
	Shunt trip (SHT)	—		○		○		○		○		○		
	Under-voltage trip (UVT)	—		○		○		○		○		○		
	Rotary handle (EH)	—		●		●		●		●		●		
	Terminal cover (TC)	●		●		●		●		●		●		
Trip Unit		Hydraulic magnetic		Hydraulic magnetic		Hydraulic magnetic		Hydraulic magnetic		Hydraulic magnetic		Hydraulic magnetic		
Tripping button		—		Equipped		Equipped		Equipped		Equipped		Equipped		

Note 1. "●" which can be installed by client, "○" which have to be installed by manufacturer. "—" which is not available.
 Above accessories table is for 3P breaker.
 2. Ics= 50% Icu
 3. Adjustable thermal: 80%~100% In.

80%~100% Adj. (A)

63			100														
BM63-SN			BM63-HN			BM100-FTD	BM100-MN		BM100-SN		BM100-HN			BM100-HBN		BM100-H	
																	
10, 15, 16, 20, 25, 30, 32, 40, 50, 60, 63			10, 15, 16, 20, 25, 30, 32, 40, 50, 60, 63			15, 20, 30, 40, 50, 60, 75, 100.	10, 15, 20, 30, 40, 50, 60, 75, 100.		10, 15, 20, 30, 40, 50, 60, 75, 100.		10, 15, 20, 30, 40, 50, 60, 75, 100.			40, 50, 63, 80, 100.		15, 20, 30, 40, 50, 60, 75, 100.	
2	3	4	2	3	4	1	2	3	2	3	2	3	4	3	4	3	4
800			800			690	690		690		800			690		690	
—			—			—	—		250*		—			—		—	
500			500			415	500		500		500			500		500	
8			8			6	6		6		8			8		8	
50	75	100	50	75	100	25.4	50	75	50	75	60	90	120	105	140	105	140
130			130			130	130		130		155			165		165	
68			68			60	68		68		68			68		86	
90			90			91	90		90		90			92		112	
111			111			111	111		111		132			126		126	
25			25			—	25		25		30			35		35	
0.45	0.65	0.85	0.45	0.65	0.85	0.29	0.45	0.65	0.45	0.65	0.9	1.3	1.6	1.5	1.9	2.1	2.6
5			5			—	5		7.5		15			20		25	
7.5			10			—	7.5		10		25			32		42	
7.5			10			5	10		10		25			36		50	
7.5			15			5*	10		15		30			36		50	
10			25			25	15		25		50			85		85	
—			—			—	—		10*		—			—		—	
—			—			—	—		15*		—			—		—	
Clamp terminal			Clamp terminal			Clamp terminal	Clamp terminal		Clamp terminal		Clamp terminal			Clamp terminal		Clamp terminal	
○	○	○	○	○	○	—	○	○	○	○	○	○	○	●	○	○	○
○	○	○	○	○	○	—	○	○	○	○	○	○	○	●	○	○	○
○	○	○	○	○	○	—	○	○	○	○	○	○	○	●	○	○	○
○	○	○	○	○	○	—	○	○	○	○	○	○	○	●	○	○	○
●	●	●	●	●	●	—	●	●	●	●	●	●	●	●	●	●	●
●	●	●	●	●	●	—	●	●	●	●	●	●	●	●	●	●	●
Hydraulic magnetic			Hydraulic magnetic			Thermal magnetic	Hydraulic magnetic		Hydraulic magnetic		Hydraulic magnetic			Adj. thermal Fixed magnetic		Thermal magnetic	
Equipped			Equipped			Equipped	Equipped		Equipped		Equipped			Equipped		Equipped	

Note: 1. Breaking Capacity of BM100-FTD is 5kA at 380V/415V/440V
 2. * DC application MCCB trip characteristic is different from AC type, please specify when place the order.

Index

MCCB
ELCB

ATS

ACB









MCB

SPD








MS

MMS

Molded Case Circuit Breaker

Frame size (AF) (Inm)		100									125											
Type		BM100-HC			BM100-HS			BM100-BTD			BM100-STD			BM125-SN			BM125-HN			BM125-LTD		
Appearance																						
Rated current In (A) at ambient temp. 40 °C		40, 50, 63, 80, 100.			40, 50, 63, 80, 100.			15, 16, 20, 25, 30, 32, 40, 50, 60, 63, 75, 80, 100			15, 16, 20, 25, 30, 32, 40, 50, 60, 63, 75, 80, 100			10, 15, 20, 30, 40, 50, 60, 75, 100, 125.			10, 15, 20, 30, 40, 50, 60, 75, 100, 125.			15, 16, 20, 25, 30, 32, 40, 50, 60, 63, 75, 80, 100, 125		
Number of poles (P)		3	4		3	4		2	3	4	2	3	4	2	3	4	2	3	4	2	3	4
Rated insulation voltage Ui (V)		AC		690		690		800		800		800		800		800		800		800		
		DC		—		—		—		—		—		—		—		—		—		
Rated operational voltage Ue (V AC)		500		500		690		690		690		690		500		500		500		690		
Uimp(kV)		8		8		8		8		8		8		8		8		8		8		
 Dimensions (mm)		a	105	140	105	140	50	75	100	50	75	100	60	90	120	60	90	120	50	75	100	
		b	165		165		130		130		155		155		130							
		c	86		86		68		68		68		68		68							
		ca	112		112		90		90		90		90		90							
		bb	126		126		111		111		132		132		111							
		aa	35		35		25		25		30		30		25							
Weight (kg)		2.1	2.6	2.1	2.6	0.5	0.7	0.9	0.5	0.7	0.9	0	30	30	0	30	30	0.5	0.7	0.9		
Rated breaking capacity (kA)		IEC 60947-2 EN 60947-2 Icu	AC	500V(690V)	42	50	(5)		(5)		7.5		15		(5)							
				440V	55	70	—		—		15		25		—							
				415V	70	85	10		25		22		25		36							
				380V	70	85	15		30		22		30		36							
				220V(240V)	100	125	25		50		30		50		85							
		DC	250V	—		—		—		—		—		—		—						
			125V	—		—		—		—		—		—		—						
Connection		Clamp terminal		Clamp terminal		Clamp terminal		Clamp terminal		Clamp terminal		Clamp terminal		Clamp terminal								
Optional accessories		Alarm switch (AL)	○	○	●		●		○		○		●									
		Auxiliary switch (AX)	○	○	●		●		○		○		●									
		Shunt trip (SHT)	○	○	●		●		○		○		●									
		Under-voltage trip (UVT)	—		—		●		●		—	○	○	—	○	○	●					
		Rotary handle (EH)	●		●		●		●		●		●		●							
		Terminal cover (TC)	●		●		●		●		●		●		●							
Trip Unit		Thermal magnetic		Thermal magnetic		Thermal magnetic		Thermal magnetic		Hydraulic magnetic		Hydraulic magnetic		Thermal magnetic								
Tripping button		Equipped		Equipped		Equipped		Equipped		Equipped		Equipped		Equipped								

Note 1. "●" which can be installed by client, "○" which have to be installed by manufacturer. "—" which is not available.
 Above accessories table is for 3P breaker.
 2. Ics= 50% Icu
 3. Adjustable thermal: 80%~100% In.

80% ~ 100% Adj. (A)					80% ~ 100% Adj. (A)										
160					250										
BM160-SN			BM160-HN		BM160-HB		BM160-HC		BM160-HS		BM250-CN			BM250-SN	
															
125, 140, 160.			125, 140, 160.		125, 140, 160.		125, 140, 160.		125, 140, 160.		125, 150, 175, 200, 225, 250.			125, 150, 175, 200, 225, 250.	
2	3	4	3	4	3	4	3	4	3	4	2	3	4	3	4
800			690		690		690		690		690			800	
—			—		—		—		—		250*	—	—	—	
500			500		500		500		500		500			500	
8			8		8		8		8		8			8	
105	105	140	105	140	105	140	105	140	105	140	105	105	140	105	140
165			165		165		165		165		165			165	
68			68		86		86		86		68			68	
92			92		112		112		112		92			92	
126			126		126		126		126		126			126	
35			35		35		35		35		35			35	
1.3	1.5	1.9	1.5	1.9	2.1	2.6	2.1	2.6	2.1	2.6	1.3	1.5	1.9	1.5	1.9
15			20		25		42		50		7.5			15	
25			32		42		55		70		15			25	
25			36		50		70		85		15			25	
30			36		50		70		85		22			30	
50			85		85		100		125		30			50	
—			—		—		—		—		10*	—	—	—	
—			—		—		—		—		15*	—	—	—	
Clamp terminal			Clamp terminal		Clamp terminal		Clamp terminal		Clamp terminal		Clamp terminal			Clamp terminal	
•	•	•	•	•	○	○	○	○	○	○	•	•	•	•	•
•	•	•	•	•	○	○	○	○	○	○	•	•	•	•	•
•	•	•	•	•	○	○	○	○	○	○	•	•	•	•	•
•	•	•	•	•	—	—	—	—	—	—	•	•	•	•	•
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Adj. thermal Fixed magnetic			Adj. thermal Fixed magnetic		Thermal magnetic		Thermal magnetic		Thermal magnetic		Adj. thermal Fixed magnetic			Adj. thermal Fixed magnetic	
Equipped			Equipped		Equipped		Equipped		Equipped		Equipped			Equipped	

Note * DC application MCCB trip characteristic is different from AC type, please specify when place the order.

Index

MCCB
ELCB

ATS

ACB

MCB







SPD

MS







MMS

Molded Case Circuit Breaker

80% ~ 100% Adj. (A)

Frame size (AF) (Inm)		250								400			
Type		BM250-HN		BM250-HB		BM250-HC		BM250-HS		BM400-CN			
Appearance													
Rated current In (A) at ambient temp. 40 °C		175, 200, 225, 250.		100, 125, 150, 160, 175, 200, 225, 250.		175, 200, 225, 250.		175, 200, 225, 250.		250, 300, 350, 400.			
Number of poles (P)		3	4	3	4	3	4	3	4	2	3	4	
Rated insulation voltage Ui (V)	AC	690		690		690		690		690			
	DC	—		—		—		—		250*	—	—	
Rated operational voltage Ue (V AC)		500		500		500		500		500			
Uimp(kV)		8		8		8		8		8			
Dimensions 	a	105	140	105	140	105	140	105	140	140	140	185	
	b	165		165		165		165		257			
	c	68		86		86		86		103			
	ca	92		112		112		112		155			
	bb	126		126		126		126		194			
	aa	35		35		35		35		44			
Weight (kg)		1.5	1.9	2.1	2.6	2.1	2.6	2.1	2.6	5.0	5.7	7.5	
Rated breaking capacity (kA)	IEC 60947-2 EN 60947-2 Icu	500V(690V)	20		25		42		50		14		
		440V	32		42		55		70		22		
		415V	36		50		70		85		25		
		380V	36		50		70		85		25		
		220V(240V)	85		85		100		125		35		
	DC	250V	—		—		—		—		10*	—	—
		125V	—		—		—		—		15*	—	—
Connection		Clamp terminal		Clamp terminal		Clamp terminal		Clamp terminal		Busbar			
Optional accessories	Alarm switch (AL)	●		○		○		○		●			
	Auxiliary switch (AX)	●		○		○		○		●			
	Shunt trip (SHT)	●		○		○		○		●			
	Under-voltage trip (UVT)	●		—		—		—		●			
	Rotary handle (EH)	●		●		●		●		●			
	Terminal cover (TC)	●		●		●		●		●			
Trip Unit		Adj. thermal Fixed magnetic		Thermal magnetic		Thermal magnetic		Thermal magnetic		Thermal magnetic			
Tripping button		Equipped		Equipped		Equipped		Equipped		Equipped			

Note 1. "●" which can be installed by client, "○" which have to be installed by manufacturer. "—" which is not available.
 Above accessories table is for 3P breaker.
 2. Ics= 50% Icu
 3. Adjustable thermal: 80%~100% In.
 4. * DC application MCCB trip characteristic is different from AC type, please specify when place the order.

400				630							
BM400-SN		BM400-HN		BM400-RN		BM400-UN		BM630-CN		BM630-SN	
											
250, 300, 350, 400.		250, 300, 350, 400.		250, 300, 350, 400.		250, 300, 350, 400.		500, 600, 630.		500, 600, 630.	
3	4	3	4	3	4	3	4	3	4	3	4
690		690		690		690		690		690	
—		—		—		—		250*		250*	
500		500		500		500		500		500	
8		8		8		8		8		8	
140	185	140	185	140	185	140	185	210	280	210	280
257		257		257		257		275		275	
103		103		103		103		103		103	
155		155		155		155		155		155	
194		194		194		194		243		243	
44		44		44		44		70		70	
5.7	7.5	5.7	7.5	5.7	7.5	5.7	7.5	10	13	10	13
20		25		42		65		14		20	
30		42		55		85		22		30	
35		50		70		85		25		35	
35		50		70		85		25		35	
50		85		100		125		35		50	
—		—		—		—		10*		20*	
—		—		—		—		—		—	
Busbar		Busbar		Busbar		Busbar		Busbar		Busbar	
•		•		•		•		•		•	
•		•		•		•		•		•	
•		•		•		•		•		•	
•		•		•		•		•		•	
•		•		•		•		•		•	
•		•		•		•		•		•	
Thermal magnetic		Thermal magnetic		Thermal magnetic		Thermal magnetic		Fixed thermal Adj. magnetic		Fixed thermal Adj. magnetic	
Equipped		Equipped		Equipped		Equipped		Equipped		Equipped	

Note * DC application MCCB trip characteristic is different from AC type, please specify when place the order.

Index

MCCB
ELCB

ATS

ACB







MCB

SPD






MS

MMS

Molded Case Circuit Breaker

Frame size (AF) (Inm)		630				800						
Type		BM630-HN		BM630-RN		BM630-UN		BM800-CN		BM800-SN		
Appearance												
Rated current In (A) at ambient temp. 40 °C		500, 630.		500, 630.		500, 630.		700, 800.		700, 800.		
Number of poles (P)		3	4	3	4	3	4	3	4	3	4	
Rated insulation voltage Ui (V)	AC	690		690		690		690		690		
	DC	250*	—	—	—	—	—	250*	—	250*	—	
Rated operational voltage Ue (V AC)		500		500		500		500		500		
Uimp(kV)		8		8		8		8		8		
Dimensions 	a	210	280	210	280	210	280	210	280	210	280	
	b	275		275		275		275		275		
	c	103		103		103		103		103		
	ca	155		155		155		155		155		
	bb	243		243		243		243		243		
	aa	70		70		70		70		70		
Weight (kg)		10	13	10	13	10	13	10.5	13.5	10.5	13.5	
Rated breaking capacity (kA)	IEC 60947-2 EN 60947-2 AC	500V(690V)	25		42		65		20		25	
		440V	50		70		85		30		50	
		415V	50		70		85		35		50	
		380V	50		70		100		35		50	
		220V(240V)	85		100		125		50		85	
	DC	250V	40*	—	—	—	—	—	20*	—	40*	—
	125V	—		—		—		—		—		
Connection		Busbar		Busbar		Busbar		Busbar		Busbar		
Optional accessories	Alarm switch (AL)	•		•		•		•		•		
	Auxiliary switch (AX)	•		•		•		•		•		
	Shunt trip (SHT)	•		•		•		•		•		
	Under-voltage trip (UVT)	•		•		•		•		•		
	Rotary handle (EH)	•		•		•		•		•		
	Terminal cover (TC)	•		•		•		•		•		
Trip Unit		Fixed thermal Adj. magnetic		Fixed thermal Adj. magnetic		Fixed thermal Adj. magnetic		Fixed thermal Adj. magnetic		Fixed thermal Adj. magnetic		
Tripping button		Equipped		Equipped		Equipped		Equipped		Equipped		

Note 1 "•" which can be installed by client, "◦" which have to be installed by manufacturer. "—" which is not available.
 Above accessories table is for 3P breaker.
 2. Ics= 50% Icu
 3. * DC application MCCB trip characteristic is different from AC type, please specify when place the order.

800		1000		1200		1600			
BM800-HN		BM800-RN		BM1000-HS		BM1200-HS		BM1600-HS	
									
700, 800.		700, 800.		1000		1200		1400, 1600.	
3	4	3	4	3	3	3	3	3	3
690		690		1000		1000		1000	
—		—		—		—		—	
500		500		500		500		500	
8		8		8		8		8	
210	280	210	280	210	210	210	210	210	210
275		275		406		406		406	
103		103		140		140		140	
155		155		190		190		190	
243		243		375		375		375	
70		70		70		70		70	
10.5	13.5	10.5	13.5	23	23	23	23	23	23
42		65		65		65		65	
70		85		85		85		85	
70		85		85		85		85	
70		100		100		100		100	
100		125		130		130		130	
—		—		—		—		—	
—		—		—		—		—	
Busbar		Busbar		Busbar		Busbar		Busbar	
•	•	•	•	○	○	○	○	○	○
•	•	•	•	○	○	○	○	○	○
•	•	•	•	○	○	○	○	○	○
•	•	•	•	○	○	○	○	○	○
•	•	•	•	—	—	—	—	—	—
•	•	•	•	—	—	—	—	—	—
Fixed thermal Adj. magnetic		Fixed thermal Adj. magnetic		Fixed thermal Adj. magnetic		Fixed thermal Adj. magnetic		Fixed thermal Adj. magnetic	
Equipped		Equipped		Equipped		Equipped		Equipped	

Index

MCCB
ELCB

ATS

ACB






MCB

SPD






MS

MMS

Molded Case Circuit Breaker (BMA Series)

Frame size (AF) (Inm)		125			160			250			400			
Model		BMA125 -STA	BMA125 -LTA	BMA125 -HTA	BMA160 -STA	BMA160 -LTA	BMA160 -HTA	BMA250 -STA	BMA250 -LTA	BMA250 -HTA	BMA400 -LTA	BMA400 -HTA	BMA400 -RTA	
Appearance														
Rated current In (A) at ambient temp. 40°C		15, 16, 20, 25, 30, 32, 40, 50, 60, 63, 75, 80, 100, 125A			40, 50, 60, 63, 70, 75, 80, 100, 125, 140, 150, 160A			175, 200, 225, 250A			250, 300, 350, 400A			
Number of poles (P)		3		4	3		4	3		4	3		4	
Rated insulation voltage Ui (V)		AC		800			800			800			1000	
Rated operational voltage Ue(V AC)		690			690			690			690			
Uimp(kV)		8			8			8			8			
Dimensions 	a	90	120	105	140	105	140	105	140	140	185			
	b	155	155	165	165	165	165	165	165	257	257			
	c	68	68	68	68	68	68	68	68	103	103			
	ca	92	92	92	92	92	92	92	92	155	155			
	bb	132	132	126	126	126	126	126	126	194	194			
	aa	30	30	35	35	35	35	35	35	44	44			
	Weight (kg)		0.7		0.9	1.5		1.9	1.5		1.9	5.7		7.5
Rated breaking capacity (kA)	IEC 60947-2 EN 60947-2 Icu AC	690V	8 kA	8 kA	10 kA	8 kA	8 kA	10 kA	8 kA	8 kA	10 kA	8 kA	10 kA	15 kA
		415V	25 kA	36 kA	50 kA	25 kA	36 kA	50 kA	25 kA	36 kA	50 kA	36 kA	50 kA	70 kA
		380V	25 kA	36 kA	50 kA	25 kA	36 kA	50 kA	25 kA	36 kA	50 kA	36 kA	50 kA	70 kA
		220V(240V)	50 kA	85 kA	100 kA	85 kA	85 kA	100 kA	85 kA	85 kA	100 kA	70 kA	85 kA	100 kA
Connection		Clamp terminal	Clamp terminal	Clamp terminal	Clamp terminal	Clamp terminal	Clamp terminal	Clamp terminal	Clamp terminal	Clamp terminal	Busbar	Busbar	Busbar	
Optional accessories	Alarm switch	(AL)	•	•	•	•	•	•	•	•	•	•	•	
	Auxiliary switch	(AX)	•	•	•	•	•	•	•	•	•	•	•	
	Shunt trip	(SHT)	•	•	•	•	•	•	•	•	•	•	•	
	Under-voltage trip	(UVT)	•	•	•	•	•	•	•	•	•	•	•	
	Rotary handle	(EH)	•	•	•	•	•	•	•	•	•	•	•	
	Terminal cover	(TC)	•	•	•	•	•	•	•	•	•	•	•	
Trip Unit		Adjustable Thermal Fixed Magnetic			Adjustable Thermal Fixed Magnetic			Adjustable Thermal Fixed Magnetic			Adjustable Thermal Fixed Magnetic			
Tripping button		Equipped	Equipped	Equipped	Equipped	Equipped	Equipped	Equipped	Equipped	Equipped	Equipped	Equipped	Equipped	

Note 1. Ics=100%Icu

630		800		630		800		1250	
BMA630-HTD	BMA630-RTD	BMA800-HTD	BMA800-RTD	BMA630-HED	BMA630-RED	BMA800-HED	BMA800-RED	BMA1250-HED	BMA1250-RED
									
500, 600, 630A		700, 800A		630A		800A		1250A	
3	4	3	4	3	4	3	4	3	4
1000		1000		1000		1000		1000	
690		690		690		690		690	
8		8		8		8		8	
210	280	210	280	210	280	210	280	210	280
275	275	275	275	275	275	275	275	327	327
103	103	103	103	103	103	103	103	141	141
155	155	155	155	155	155	155	155	205	205
243	243	243	243	243	243	243	243	200	200
70	70	70	70	70	70	70	70	199	339
10	13	10	13	11.5	15.3	12	15.8	13.3	17.2
10 kA	15 kA	10 kA	15 kA	10 kA	15 kA	10 kA	15 kA	35kA	45 kA
50 kA	70 kA	50 kA	70 kA	50 kA	70 kA	50 kA	70 kA	50 kA	70 kA
50 kA	70 kA	50 kA	70 kA	50 kA	70 kA	50 kA	70 kA	50 kA	70 kA
85 kA	100 kA	85 kA	100 kA	85 kA	100 kA	85 kA	100 kA	—	—
Busbar	Busbar	Busbar	Busbar	Busbar	Busbar	Busbar	Busbar	Busbar	Busbar
•	•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	—	—
•	•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	—	—
Fixed Thermal Adjustable Magnetic		Fixed Thermal Adjustable Magnetic		Electronic		Electronic		Electronic	
Equipped	Equipped	Equipped	Equipped	Equipped	Equipped	Equipped	Equipped	Equipped	Equipped

Index

MCCB
ELCB

ATS

ACB

MCB

SPD

MS

MMS



Molded Case Circuit Breaker (Electronic trip Unit)

Frame size (AF) (Inm)		100			160			250			
Type		BM100-HE	BM100-RE	BM100-UE	BM160-HE	BM160-RE	BM160-UE	BM250-HE	BM250-RE	BM250-UE	
Rated current In (A) at ambient temp. 40 °C		100			160			250			
Electronically adjustable current Ir (A)		40, 45, 50, 60, 70, 80, 90, 95, 100.			64, 72, 80, 96, 112, 128, 144, 152, 160.			100, 113, 125, 150, 175, 200, 225, 238, 250.			
Rated operational voltage Ue (V AC)		500			500			500			
Rated insulation voltage Ui (V)		690			690			690			
Rated impulse withstand voltage Uimp (kV)		8			8			8			
Number of poles (P)		3P / 4P			3P / 4P			3P / 4P			
Model		HE	RE	UE	HE	RE	UE	HE	RE	UE	
Rated breaking capacity Icu (kA)		50	70	85	50	70	85	50	70	85	
Dimensions (mm)	<p>(mm)</p>	a	105 / 140			105 / 140			105 / 140		
		b	165			165			165		
		c	86			86			86		
		ca	112			112			112		
		bb	126			126			126		
		aa	35			35			35		
Weight (kg)		2.5 / 3.0			2.5 / 3.0			2.5 / 3.0			
Endurance	Electrical life (10 thousand)	1,000			1,000			1,000			
	Mechanical life (10 thousand)	8,500			7,000			7,000			
Connection		Clamp terminal			Clamp terminal			Clamp terminal			
Trip unit		Electronic			Electronic			Electronic			
Trip button		Equipped			Equipped			Equipped			
Optional accessories	Alarm switch (AL)	○			○			○			
	Auxiliary switch (AX)	○			○			○			
	Shunt trip (SHT)	○			○			○			
	Under-voltage trip (UVT)	—			—			—			
	Lead wiring terminal (LT)	○			○			○			
	Motor operation device	○			○			○			
	Communication (COM)	○			○			○			
Communication (HUB)	○			○			○				

Note 1. Ics= 50% Icu

400			630			800			1000		1250	
BM400-HE	BM400-RE	BM400-UE	BM630-HE	BM630-RE	BM630-UE	BM800-SE	BM800-HE	BM800-RE	BM1000-SE	BM1000-HE	BM1250-SE	BM1250-HE
400			630			800			1000		1250	
160, 180, 200, 240, 280, 320, 360, 380, 400.			252, 284, 315, 378, 441, 504, 567, 600, 630.			320, 360, 400, 480, 560, 640, 720, 760, 800.			400, 450, 500, 600, 700, 800, 900, 950, 1000.		500, 563, 625, 750, 875, 1000, 1125, 1188, 1250.	
500			500			500			500		500	
690			690			690			690		690	
8			8			8			8		8	
3P / 4P			3P / 4P			3P / 4P			3P		3P	
HE	RE	UE	HE	RE	UE	SE	HE	RE	SE	HE	SE	HE
50	70	85	50	70	85	50	70	85	70	85	70	85
140 / 185			210 / 280			210 / 280			210		210	
257			275			275			406		406	
103			103			103			140		140	
144			155			155			190		190	
194			243			243			375		375	
44			70			70			70		70	
7 / 8			11.5 / 14.5			11.5 / 14.5			26		26	
1, 000			1, 000			500			500		500	
4, 000			4, 000			2, 500			2, 500		2, 500	
Busbar			Busbar			Busbar			Busbar		Busbar	
Electronic			Electronic			Electronic			Electronic		Electronic	
Equipped			Equipped			Equipped			Equipped		Equipped	
○			○			○			○		○	
○			○			○			○		○	
○			○			○			—		—	
○			○			○			—		—	
—			—			—			—		—	
○			○			○			—		—	
○			○			○			—		—	
○			○			○			—		—	

Index

MCCB
ELCB

ATS

ACB





MCB

SPD

MS






MMS

Earth Leakage Circuit Breaker

Frame size (AF) (Inm)		50		100				
Type		BL50-SN		BL100-SN		BL100-HN		
Appearance								
Rated current In (A) at ambient temp. 40°C		15, 20, 30, 40, 50.		15, 20, 30, 40, 50, 60, 75, 100.		15, 20, 30, 40, 50, 60, 75, 100.		
Phase & wire (P)		1ø2W, 3ø3W.	3ø4W	1ø2W, 3ø3W.	3ø4W	1ø2W, 3ø3W.	3ø4W	
Number of poles (P)		3	4	3	4	3	4	
Rated voltage (VAC)		230, 400.		230, 400.		230, 400.		
High speed	Rated current sensitivity I Δ n (mA)	30, 100, 300, 500 (Note 2)		30, 100, 300, 500 (Note 2)		30, 100, 300, 500 (Note 2)		
	5I Δ n operating time (S)	0.04		0.04		0.04		
Delay	Rated current sensitivity I Δ n (mA)	100- 300- 500 adjustable		100- 300- 500 adjustable		100- 300- 500 adjustable		
	2I Δ n operating time (S)	0.1- 0.4- 0.8- 2.0 adjustable		0.1- 0.4- 0.8- 2.0 adjustable		0.1- 0.4- 0.8- 2.0 adjustable		
	2I Δ n max. non-operating time (S)	0, 0.2, 0.4, 1.0		0, 0.2, 0.4, 1.0		0, 0.2, 0.4, 1.0		
	Leakage detection mode	Mechanical push-button		Mechanical push-button		Mechanical push-button		
Dimensions	 (mm)	a	75	100	90	120	90	120
		b	130		155		155	
		c	68		68		68	
		ca	90		90		90	
		bb	111		132		132	
		aa	25		30		30	
Weight (kg)		0.7	0.9	1.5	1.8	1.5	1.8	
SPD Rated breaking capacity (kA)	IEC 60947-2 EN 60947-2 CNS 14816-2 AC Icu	440V	7.5		10		25	
		380V	7.5		15		30	
		220V	10		25		50	
Connection		Clamp terminal		Clamp terminal		Clamp terminal		
Optional accessories	Alarm switch (AL)	○		○		○		
	Auxiliary switch (AX)	○		○		○		
	Shunt trip (SHT)	○		○		○		
	Under-voltage trip (UVT)	—		○		○		
	Rotary handle (EH)	●		●		●		
	Terminal cover (TC)	●		●		●		
	Leakage alarm module (AM)	—		○		○		
Trip Unit		Hydraulic magnetic		Hydraulic magnetic		Hydraulic magnetic		
Tripping button		Equipped		Equipped		Equipped		

- Note
1. "●" which can be installed by client, "○" which have to be installed by manufacturer. "—" which is not available.
 2. Specify rated current sensitivity when place the order.
 3. Ics= 50% Icu
 4. Adjustable thermal: 80%~100% In.
 5. Specify, when order delay type rated current sensitivity 30-100-500mA.

80% ~ 100% Adj. (A)

160		250		400					
BL160-SN		BL250-SN		BL400-SN		BL400-HN		BL400-RN	
									
125, 140, 160.		175, 200, 225, 250.		250, 300, 350, 400.		250, 300, 350, 400.		250, 300, 350, 400.	
1ø2W, 3ø3W.	3ø4W	1ø2W, 3ø3W.	3ø4W	1ø2W, 3ø3W.	3ø4W	1ø2W, 3ø3W.	3ø4W	1ø2W, 3ø3W.	3ø4W
3	4	3	4	3	4	3	4	3	4
230, 400.		230, 400.		230, 400.		230, 400.		230, 400.	
30, 100-300-500 Adj.		30- 100- 500 adjustable		30- 100- 500 adjustable		30- 100- 500 adjustable		30- 100- 500 adjustable	
0.04		0.04		0.04		0.04		0.04	
100- 300- 500 adjustable		100- 300- 500 adjustable		100- 300- 500 adjustable		100- 300- 500 adjustable		100- 300- 500 adjustable	
0.1- 0.4- 0.8- 2.0 adjustable		0.1- 0.4- 0.8- 2.0 adjustable		0.1- 0.4- 0.8- 2.0 adjustable		0.1- 0.4- 0.8- 2.0 adjustable		0.45- 1.0- 2.0 adjustable	
0, 0.2, 0.4, 1.0		0, 0.2, 0.4, 1.0		0, 0.2, 0.4, 1.0		0, 0.2, 0.4, 1.0		0.1, 0.5, 1.0	
Mechanical push-button		Mechanical push-button		Mechanical push-button		Mechanical push-button		Mechanical push-button	
105	140	105	140	140	185	140	185	140	185
165		165		257		257		257	
68		68		103		103		103	
92		92		155		155		155	
126		126		194		194		194	
35		35		44		44		44	
1.7	2.3	1.7	2.3	6.6	8.4	6.6	8.4	5.7	7.5
25		25		30		42		55	
30		30		35		50		70	
50		50		50		85		100	
Clamp terminal		Clamp terminal		Busbar		Busbar		Busbar	
•		•		•		•		•	
•		•		•		•		•	
•		•		•		•		•	
•		•		•		•		•	
•		•		•		•		•	
•		•		•		•		•	
○		○		○		○		○	
Adj. thermal Fixed magnetic		Adj. thermal Fixed magnetic		Thermal magnetic		Thermal magnetic		Thermal magnetic	
Equipped		Equipped		Equipped		Equipped		Equipped	

Index

MCCB
ELCB

ATS

ACB





MCB

SPD





MS

MMS

Earth Leakage Circuit Breaker

Frame size (AF) (Inm)		400		630				
Type		BL400-UN		BL630-HN		BL630-RN		
Appearance								
Rated current In (A) at ambient temp. 40°C		250, 300, 350, 400.		500, 630.		500, 630.		
Phase & wire (P)		1ø2W, 3ø3W.	3ø4W	1ø2W, 3ø3W.	3ø4W	1ø2W, 3ø3W.	3ø4W	
Number of poles (P)		3	4	3	4	3	4	
Rated voltage (VAC)		230, 400.		230, 400.		230, 400.		
High speed	Rated current sensitivity I Δ n (mA)	30- 100- 500 adjustable		100- 300- 500 adjustable		100- 300- 500 adjustable		
	5I Δ n operating time (S)	0.04		0.04		0.04		
Delay	Rated current sensitivity I Δ n (mA)	100- 300- 500 adjustable		100- 300- 500 adjustable		100- 300- 500 adjustable		
	2I Δ n operating time (S)	0.45- 1.0- 2.0 adjustable		0.45- 1.0- 2.0 adjustable		0.45- 1.0- 2.0 adjustable		
	2I Δ n max. non-operating time (S)	0.1, 0.5, 1.0		0.1, 0.5, 1.0		0.1, 0.5, 1.0		
	Leakage detection mode	Mechanical push-button		Mechanical push-button		Mechanical push-button		
Dimensions		a	140	185	210	280	210	280
		b	257		257		257	
		c	103		103		103	
		ca	155		155		155	
		bb	194		243		243	
		aa	44		70		70	
Weight (kg)		5.7	7.5	10.0	13.0	10.0	13.0	
SPD	Rated breaking capacity (kA)	IEC 60947-2 EN 60947-2 CNS 14816-2 AC Icu	440V	85	50	70	70	
			380V	85	50	70	70	
			220V	125	85	100	100	
Connection		Busbar		Busbar		Busbar		
Optional accessories	Alarm switch (AL)	•		•		•		
	Auxiliary switch (AX)	•		•		•		
	Shunt trip (SHT)	•		•		•		
	Under-voltage trip (UVT)	•		•		•		
	Rotary handle (EH)	•		•		•		
	Terminal cover (TC)	•		•		•		
	Leakage alarm module (AM)	○		○		○		
Trip Unit		Thermal magnetic		Fixed thermal Adj. magnetic		Fixed thermal Adj. magnetic		
Tripping button		Equipped		Equipped		Equipped		

- Note
1. "•" which can be installed by client, "○" which have to be installed by manufacturer. "—" which is not available.
 2. Specify rated current sensitivity when place the order.
 3. Ics= 50% Icu
 4. Adjustable thermal: 80%~100% In.
 5. Specify, when order delay type rated current sensitivity 30-100-500mA.

630		800					
BL630-UN		BL800-SN		BL800-HN		BL800-RN	
							
500, 630.		700, 800.		700, 800.		700, 800.	
1ø2W, 3ø3W.	3ø4W	1ø2W, 3ø3W.	3ø4W	1ø2W, 3ø3W.	3ø4W	1ø2W, 3ø3W.	3ø4W
3	4	3	4	3	4	3	4
230, 400.		230, 400.		230, 400.		230, 400.	
100- 300- 500 adjustable		100- 300- 500 adjustable		100- 300- 500 adjustable		100- 300- 500 adjustable	
0.04		0.04		0.04		0.04	
100- 300- 500 adjustable		100- 300- 500 adjustable		100- 300- 500 adjustable		100- 300- 500 adjustable	
0.45- 1.0- 2.0 adjustable		0.45- 1.0- 2.0 adjustable		0.45- 1.0- 2.0 adjustable		0.45- 1.0- 2.0 adjustable	
0.1, 0.5, 1.0		0.1, 0.5, 1.0		0.1, 0.5, 1.0		0.1, 0.5, 1.0	
Mechanical push-button		Mechanical push-button		Mechanical push-button		Mechanical push-button	
210	280	210	280	210	280	210	280
257		257		257		257	
103		103		103		103	
155		155		155		155	
243		243		243		243	
70		70		70		70	
10.0	13.0	10.5	13.5	10.5	13.5	10.5	13.5
85		50		70		85	
100		50		70		100	
125		85		100		125	
Busbar		Busbar		Busbar		Busbar	
•		•		•		•	
•		•		•		•	
•		•		•		•	
•		•		•		•	
•		•		•		•	
•		•		•		•	
○		○		○		○	
Fixed thermal Adj. magnetic		Fixed thermal Adj. magnetic		Fixed thermal Adj. magnetic		Fixed thermal Adj. magnetic	
Equipped		Equipped		Equipped		Equipped	

Index

MCCB
ELCB

ATS

ACB

MCB






SPD

MS






MMS

Molded Case Circuit Breaker

Bolt on type

Frame (AF)		100			50	100			50	100			50	100		
Type		BP			BPH			BKH			BKS					
Appearance																
Rated Voltage (A.C) #1		110	220*	220	110	220*	220	110/220*	380	110/220*	220					
Rated Current In (A) At Ambient Temp. 40°C		10*, 15, 20, 30, 40, 50, 60, 75, 100.			15, 20, 30, 40, 50.			15, 20, 30, 40, 50, 60, 75, 100.			15, 20, 30, 40, 50, 60, 75, 100.					
Number of poles (P)		1	2	3	1	2	3	1	2	3	1	2	3			
Dimensions 	a	25	50	75	25	50	75	25	50	75	25	50	75			
	b	95			95			95			95					
	c	58.5			58.5			58.5			58.5					
	ca	77.5			77.5			77.5			77.5					
	bb	100			100			100			100					
	aa	0	25	50	0	25	50	0	25	50	0	25	50			
Weight (kg)		0.15	0.31	0.46	0.2	0.4	0.6	0.22	0.44	0.66	0.22	0.44	0.66			
Rated Breaking Capacity (kA) CNS 14816-2 Icu AC #2 #3	110V / 120V*	5	—	—	10	—	—	15	—	—	25/22**	—				
	220V / 240V*	—	5***	5	—	10	10	10	15	—	—	25/22**				
	380V / 400V*	—	—	—	—	—	—	—	10	—	—	—				
Trip Unit		Thermal Magnetic			Thermal Magnetic			Thermal Magnetic			Thermal Magnetic					

Plug in type

Frame (AF)		50			100			50			100		
Type		BL			BLH			BLS			BKL		
Appearance													
Rated Voltage (A.C) #1		110/220*	220	220	110/220*	220	220	220	110/220*	380			
Rated Current In (A) At Ambient Temp. 40°C		15, 20, 30 40, 50.	15, 20, 30, 40, 50 60, 75, 100.	15, 20, 30 40, 50.	15, 20, 30, 40, 50.	60, 75, 100.	15, 20, 30 40, 50.	15, 20, 30, 40, 50 60, 75, 100.					
Number of poles (P)		1	2	3	1	2	3	2	3	1	2	3	
Dimensions 	a	25	50	75	25	50	75	50	75	25	50	75	
	b	74			74			74			79		
	c	60.5			60.5			60.5			61		
	ca	74			74			74			77.5		
	bb	—			—			—			—		
	aa	0	25	50	0	25	50	25	50	0	25	50	
Weight (kg)		0.13	0.26	0.39	0.13	0.26	0.39	0.33	0.53	0.18	0.36	0.54	
Rated Breaking Capacity (kA) CNS 14816-2 Icu AC	110V / 120V*	5	—	—	10	—	—	—	—	15	—		
	220V / 240V*	—	5	—	—	10	—	10	—	10	15		
	380V / 400V*	—	—	—	—	—	—	—	—	—	10		
Trip Unit		Thermal Magnetic			Thermal Magnetic			Thermal Magnetic			Thermal Magnetic		

Note 1. "1*" 1 phase 3 wiring; L-L: 220V, L-N: 110V.
 2. "1**" Rated Breaking Capacity: asym/sym.
 3. "1***" BP 1P 220V 5kA Rated Current:15, 20, 30, 40, 50A.

Earth Leakage Circuit Breaker | Earth Leakage, Overload, and Short Circuit Protection

Frame (AF)	50		50		50		50		50		
Type	BL-50L		BL-50UL		BLP-50L		BLP-50UL		BL-50H		
Appearance											
Rated Current In (A) At Ambient Temp. 40°C	15, 20, 30, 40, 50.										
Phase & Wire	1φ2W										
Number of poles (P)	2P1E	2P2E	2P1E	2P2E	2P1E	2P2E	2P1E	2P2E	2P1E	2P2E	
Rated Voltage (A.C.) #1.	110	220	220***	220	110	220	220***	220	220***	220/380	
Rated Current Sensitivity (mA) #2.	30, (100, 200, 300, 500)*				30				30, (100, 200, 300, 500)*		
Max. Operating Time (s)	≅ 0.1S										
Rated Breaking Capacity (kA) CNS 5422 Icu AC	110V	5	—	10	—	5	—	10	—	15	—
	220V	—	5	5	10	—	5	5	10	10	15
Dimensions 	a	25	50	25	50	25	50	25	50	50	75
	b	110				92				95	
	c	60				60.5				58.5	
	ca	78.4				78.4				77.5	
	bb	120				—				100	
	aa	0	25	0	25	0	25	0	25	25	50
Weight (kg)	0.22	0.39	0.22	0.39	0.2	0.34	0.2	0.34	0.4	0.58	
Trip Unit	Thermal Magnetic										
Earth Leakage Tripping Device	Mechanical										

Frame (AF)	Earth Leakage, Overload Protection				Earth Leakage Protection		
	30		40		30		
Type	BL-KLF		BL-KF		BL-K30F		
Appearance							
Rated Current In (A) At Ambient Temp. 40°C	15, 20, 30		15, 20, 30, 40		15, 20, 30		
Phase & Wire	1φ2W		1φ2W		1φ3W 3φ3W		
Poles (P)	2P1E	2P2E	2		3		
Rated Voltage (A.C.)	110~220		110~220		110~220	380~440	
Rated Current Sensitivity (mA) #2.	30		30, (100, 200, 300, 500)*		30		
Max. Operating Time (s)	≅ 0.1S		≅ 0.1S		≅ 0.1S		
Rated Breaking Capacity (kA) CNS 5422 Icu AC	110V~220V	1.5		1.5, 2.5		1.5	—
	380V~480V	—		—		—	1.5
Dimensions 	a	66				90	
	b	70				70	
	c	42				42	
	ca	60				60	
	bb	59				59	
	aa	33				57	
Weight (kg)	0.2				0.25		
Trip Unit	Thermal Magnetic				—		
Earth Leakage Tripping Device			Mechanical				

Note 1. "****" 3 phase 4 wiring, L-N: 220V
2. "*" Special order.

Index

MCCB
ELCB

ATS

ACB

MCB

SPD

MS

MMS

Optional Accessories Installation Table

■ **AL: Alarm Switch / AX: Auxiliary Switch / SHT: Shunt Trip / UVT: Under Voltage Trip**


Model	Poles	AL	AX	SHT or UVT	AL+AX	AL+SHT or UVT	AX+SHT or UVT	AL+AX+SHT or UVT		
BM30-SN BM50-CN BM60-SN/ HN BM63-SN/ HN BM100-SN / MN	3P							—		
BL50-SN	3P 4P									—
BL100-SN BL100-HN	3P 4P				—			—		
BM100-H/ HC/ HS BM160-HB/ HC/ HS BM250-HB/ HC/ HS	3P 4P							—		
BM100-HBN BM100-BTD/STD BM125-LTD BM160-SN/ HN BM250-SN/ HN BMA125-STA/LTA/HTA BMA160-STA/LTA/HTA BMA250-STA/LTA/HTA	3P 4P									
BL160-SN BL250-SN	3P 4P				—	—	—	—		
BM400-SN/ HN/ RN/ UN	3P 4P									
BL400-SN/ HN/ RN/ UN BMA400-LTA/HTA/RTA	3P 4P							—		
BM630-SN/ HN/ RN/ UN BM800-CN/ SN/ HN/ RN BMA630-HTA/RTA BMA800-HTA/RTA	3P 4P									
BL630-HN/ RN/ UN BL800-SN/ HN/ RN	3P 4P									
BM1000-HS BM1200-HS BM1600-HS	3P				—			—		

2P, 125AF and below : Accessories are installed on the right side.

Note:

- Standard: AL and AX are installed on left side, SHT and UVT are installed on right side.
- SHT is equipped with coil anti-burn switch.
- BL series can not do right side installation.
- UVT of BM30-SN~BM100-HN can not install on its left side.
- #1 means have no UVT.
- #2 means only can apply to 4P breakers.

● : AL
○ : AX
■ : SHT or UVT



Optional Accessories | Application Table

Rotary Handle

TYPE	Poles	Model
EH-100N	3P、4P	BM30-SN, BM50-CN, BM60-SN/HN, BM63-SN/HN, BM100-SN/MN, BL50-SN
EH-100T	3P、4P	BM100-BTD/STD
EH-100L	3P、4P	BM125-LTD
EH-125N	3P、4P	BM60-HBN, BM100-HN, BM125-SN/HN, BL100-SN/HN, BMA125-STA/LTA/HTA
EH-250N	3P、4P	BM100-HBN, BM160-SN*/HN, BM250-CN*/SN/HN, BL160-SN, BL250-SN
EH-250T	3P、4P	BMA160-STA/LTA/HTA, BMA250-STA/LTA/HTA
EH-400N	3P、4P	BM400-CN*/SN/HN/RN/UN, BL400-SN/HN/RN/UN, BMA400-LTA/HTA/RTA
EH-800N	3P、4P	BM630-SN/HN/RN/UN, BM800-CN/SN/HN/RN, BL630-HN/RN/UN, BL800-SN/HN/RN, BMA630-HTA/RTA, BMA800-HTA/RTA
EH-250H	3P、4P	BM100-H/HC/HS, BM160-HB/HC/HS, BM250-HB/HC/HS

Extended Rotary Handle

TYPE	Poles	Model
MA-100N	3P、4P	BM30-SN, BM50-CN, BM60-SN/HN, BM63-SN/HN, BM100-SN/MN, BL50-SN
MA-100T	3P、4P	BM100-BTD/STD
MA-100L	3P、4P	BM125-LTD
MA-125N	3P、4P	BM60-HBN, BM100-HN, BM125-SN/HN, BL100-SN/HN, BMA125-STA/LTA/HTA
MA-250N	3P、4P	BM100-HBN, BM160-SN/HN, BM250-SN/HN, BL160-SN, BL250-SN
MA-250T	3P、4P	BMA160-STA/LTA/HTA, BMA250-STA/LTA/HTA
MA-400N	3P、4P	BM400-SN/HN/RN/UN, BL400-SN/HN/RN/UN, BMA400-LTA/HTA/RTA
MA-800N	3P、4P	BM630-SN/HN/RN/UN, BM800-CN/SN/HN/RN, BL630-HN/RN/UN, BL800-SN/HN/RN, BMA630-HTA/RTA, BMA800-HTA/RTA
MA-250H	3P、4P	BM100-H/HC/HS, BM160-HB/HC/HS, BM250-HB/HC/HS

Note: Applicable voltage: ① DC 24V ② AC 110V/ DC 110V ③ AC 230V/ DC 220V

Motor Operation Device

TYPE	Poles	Model
MT-100N	3P、4P	BM30-SN, BM50-CN, BM60-SN/HN, BM63-SN/HN, BM100-SN/MN, BL50-SN
MT-125N	3P、4P	BM60-HBN, BM100-HN, BM125-SN/HN, BL100-SN/HN, BMA125-STA/LTA/RTA
MT-250N	3P、4P	BM100-HBN, BM160-SN/HN, BM250-SN/HN, BL160-SN, BL250-SN, BMA160-STA/LTA/HTA, BMA250-STA/LTA/HTA
MT-400N	3P、4P	BM400-SN/HN/RN/UN, BL400-SN/HN/RN/UN, BMA400-LTA/HTA/RTA
MT-800N	3P、4P	BM630-SN/HN/RN/UN, BM800-CN/SN/HN/RN, BL630-HN/RN/UN, BL800-SN/HN/RN, BMA630-HTA/RTA, BMA800-HTA/RTA
MT-250E	3P、4P	BM100-H/HC/HS, BM160-HB/HC/HS, BM250-HB/HC/HS

Note: Indicates the value is can applied to 2P model.

Rear Connection

TYPE	Poles	Model
PGI-100N50	3P	BM30-SN, BM50-CN, BM60-SN/HN, BM63-SN/HN, BL50-SN (50A and below), BM50-CN
PGI-100N	3P	BM60-SN/HN, BM100-SN/MN (60A and below)
PGI-125N50	3P	BM60-HBN, BM100-HN, BM125-SN/HN, BL100-SN/HN (50A and below)
	4P	BM100-HN, BM125-SN, BL100-SN/HN (50A and below)
PGI-125N	3P	BM60-HBN, BM100-HN, BM125-SN, BL100-SN/HN (60A and above)
	4P	BM100-HN, BM125-SN, BL100-SN/HN (60A and above)
PGI-250N	3P、4P	BM100-HBN, BM160-SN/HN, BM250-SN/HN, BL160-SN, BL250-SN
PGI-400N	3P、4P	BM400-SN/HN/RN/UN, BL400-SN/HN/RN/UN
PGI-800N	3P、4P	BM630-SN/HN/RN/UN, BM800-CN/SN/HN/RN, BL630-HN/RN/UN, BL800-SN/HN/RN
PGI-BM250	3P	BM100-H/HC/HS, BM160-HB/HC/HS, BM250-HB/HC/HS

Index

MCCB
ELCB

ATS

ACB

MCB

SPD

MS

MMS

Optional Accessories | Dimensions

Rotary Handle

Type	Poles	fig.1				fig.2			fig.3		
		A	B	C	D	E	F	G	H	J	K
EH-100N	3P, 4P	104	105	39	44	90	78	10	25	111	M4 or ø5
EH-100T	3P, 4P	104	105	39	44	90	78	10	25	111	
EH-100L	3P, 4P	104	105	39	44	90	78	10	35	126	
EH-125N	3P, 4P	104	105	39	44	90	78	10	30	132	
EH-250N	3P, 4P	104	105	39	44	90	78	10	35	126	
EH-250H	3P, 4P	104	125	39	44	90	78	10	35	126.5	
EH-400N	3P, 4P	150	173	60	77	108	112	10	44	194	
EH-800N	3P, 4P	150	173	60	77	108	112	10	70	243	




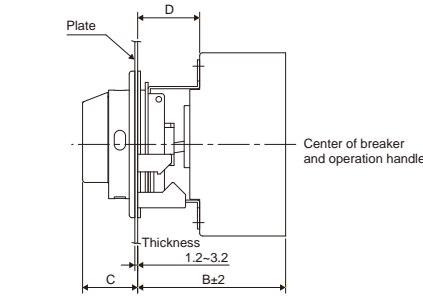


Fig. 1



Panel Dimension
Fig. 2





Breaker Dimension
Fig. 3

Note: 1. Optional for dust and water protection.


Extended Rotary Handle

Type	Dimensions (mm)					Screw
	A	B	C	D	Y	
MA-100N	111	25	125	229	+8	M4x80
MA-100T	111	25	125	229	0	M4x75
MA-100L	111	25	125	229	0	M4x75
MA-125N	114	30	125	229	+8	M4x80
MA-250N	126	35	125	229	0	ST3x10
MA-250H	126	35	143	247	0	M4x50
MA-400N	221	44	190	290	+10	M5x50
MA-800N	242	70	190	290	+10	M6x125 & M6x12

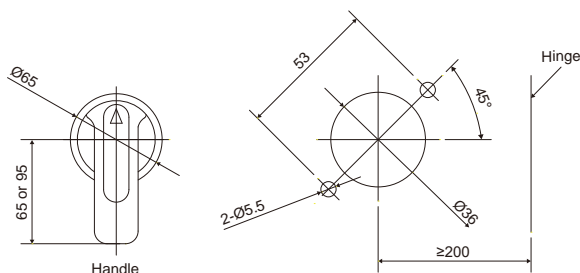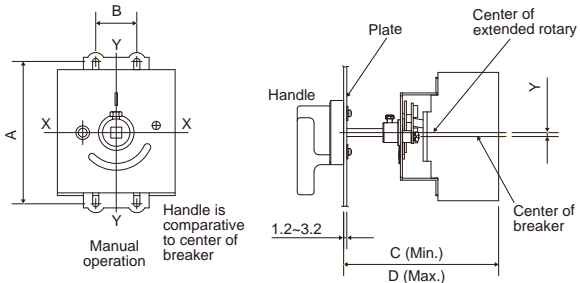


Motor Operation Device

Type	Dimensions (mm)						
	A	B	d	H	K	L	W
MT-100N	25	111	ø4.5	16.5	79	102	74
MT-125N	30	132	ø4.5	15	77	116	90
MT-250N	30	126	ø4.5	15	77	116	90
MT-400N	44	194	ø4.5	36	115	176	130
MT-800N	70	234	ø4.5	36	115	176	130
MT-250E	30	126	ø4.5	15	77	116	90

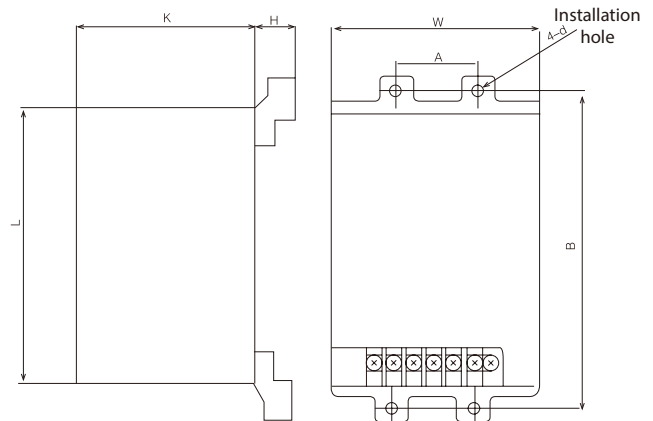


■ Rear Connection

Type	Poles	Dimensions (mm)																	Connect Direction		
		A	A1	B	B1	C	D	D1	E	F	G	H	H1	J	K	K1	K2	L	M	Horizontal	Vertical
PGI-100N	3	74	50	24	58	90	ø5	/	116	M10	9.5	28	12	M10	/	62	122	50	M4	⊙	⊙
	4	99	75															75			
PGI-125N	3	92	60	30	70	104	ø6	/	134	M10	13	26	16	M10	/	62	122	60	M5	⊙	⊙
	4	122	90															90			
PGI-250N	3	107	70	38	76	106	ø6	ø10	144	25	13	34	15	6	/	79	134	70	M5	⊙	⊙
	4	142	105															105			
PGI-400N	3	137	44	50	135	175	ø10	ø13	225	28	18	40	24	8	120	79	/	44	M8	⊙	⊙
	4	181	88															88			
PGI-800N	3	212	140	57	143	185	ø10	ø13	243	44	17	53	20	11	/	146	/	140	M8	⊙	⊙
	4	282	210															210			

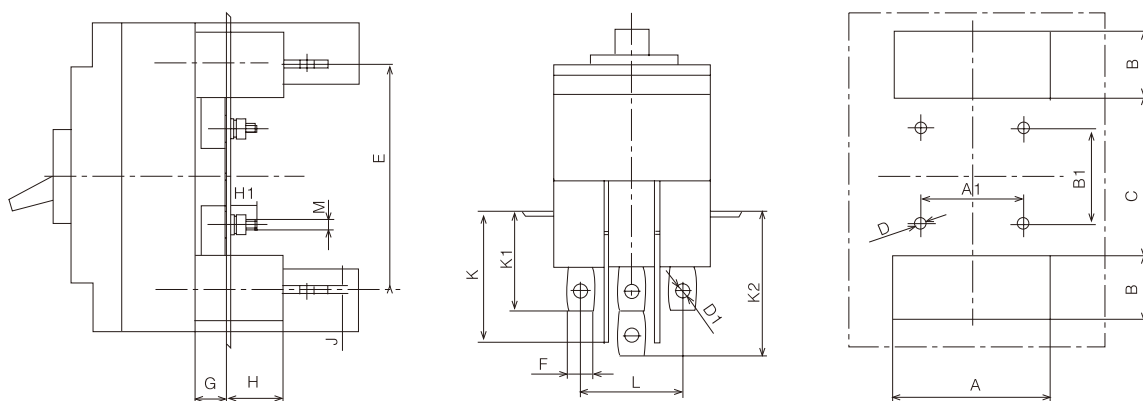

■ Rear Connection

Type	Poles	Dimensions (mm)																	Connect Direction		
		A	A1	B	B1	C	D	D1	E	F	G	H	H1	J	K	K1	K2	L	M	Horizontal	Vertical
PGI-BM250	3	107	70	38	76	106	ø6	ø10	144	25	13	34	15	6	/	79	134	70	M5	⊙	⊙

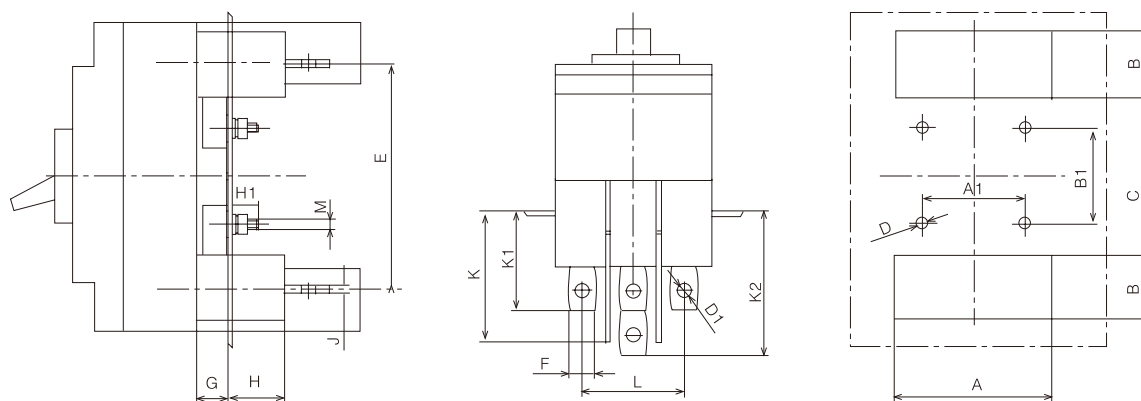



ATS (Automatic Transfer Switches)

A. PC Class

Frame size		63			125			250			500		
Insulation Voltage, Ui		AC800V											
Rated Impulse Withstand Voltage, Uimp		12kV											
Rated Voltage, Ue		2P: AC220 / 230 / 240V 3/4P: AC380 / 400 / 415V											
Control Voltage, Us		AC220 / 230 / 240V, 50/60Hz											
Rated Current, In (A)		16, 20, 25, 32, 40, 50, 63			80, 100, 125			160, 200, 225, 250			350, 400, 500		
Pole		2	3	4	2	3	4	2	3	4	2	3	4
Operation current (A)	AC220/230 /240V	3	3	4	3	3	4	5	5	5	5	5	6
Tripping current (A)	AC220/230 /240V	1									1.4		
Rated condition short circuit current (fuse)		100kA			100kA			120kA			120kA		
Rated condition short circuit current (breaker)		50kA			50kA			65kA			65kA		
Making and Breaking Capacity		AC-33B, DC-33B											
Switching time	I -> II	≤1s											
	II -> I												
Endurance		Electrical: 6000 Mechanical: 20000											
Switching frequency		120 times / hr											
Auxiliary switch		2NO2NC on both source AC110V, 5A AC220V, 3A DC220V, 0.2A											

Note : AC-33A: Making & Breaking: 10Ie, cosφ=0.35
 AC-33B: Making & Breaking: 10Ie, cosφ=0.35 (Ie≤100A, cosφ=0.45)
 DC-33B: Making & Breaking: 4Ie, L/R=2.5ms



ATS Controller Specification

• XST-5

Type	Standard
Poles	2 / 3 / 4
Rated operation voltage (V)	AC380 / 220 AC400 / 230 AC415 / 240
Rated operation frequency (Hz)	50 / 60
Operation voltage (V)	165~300 (Phase voltage)
Operation temperature (°C)	-25 ~ 60
Optional functions	—

Index

MCCB
ELCB

ATS

ACB

MCB

SPD

MS

MMS

800		1250		2500		5000	
AC800V							
12kV							
AC400V							
AC220V, 50Hz							
630, 800		1000, 1250		1600, 2000, 2500		3200, 4000, 5000	
3	4	3	4	3	4	3	4
6	6	6	8	8	9	18	20
2							
120kA		120kA		—		200kA	
50kA		50kA		50kA		—	
AC-33B, DC-33B						AC-33A, DC-33B	
≤1s							
Electrical: 6000 Mechanical: 10000							
120 times / hr							
2NO2NC on both source AC110V, 5A AC220V, 3A DC220V, 0.2A							

Index

MCCB
ELCB

ATS

ACB

MCB

SPD

MS

MMS



ATS Controller Specification

• XST-6

Type	Multifunction
Poles	2 / 3 / 4
Rated operation voltage (V)	AC380 / 220 AC400 / 230 AC415 / 240
Rated operation frequency (Hz)	50 / 60
Operation voltage (V)	165~300 (Phase voltage)
Operation temperature (°C)	-25 ~ 60
Optional functions	Current measurement + communication



(Controller voltage: AC 220V)

ATS (Automatic Transfer Switches)

A. MCCB Type

Type	Pole	Rated current In (A)	Rated Breaking Capacity Sym r.m.s. (kA) IEC 60947-2 AC Icu	
			220V	380V
BS100SN	2P, 3P, 4P	10, 15, 20, 30, 40, 50, 60, 75, 100.	25	15
BS100HN	2P, 3P, 4P		50	30
BS250SN	2P, 3P, 4P	125, 150, 175, 200, 225, 250.	50	30
BS400SN	2P, 3P, 4P	250, 300, 350, 400.	50	35
BS400HN	2P, 3P, 4P		85	50
BS630SN	3P, 4P	500, 600, 630.	50	35
BS630HN	3P, 4P		85	50
BS800SN	3P, 4P	700, 800.	85	50
BS1000HS	3P	1000	130	100
BS1200HS	3P	1200	130	100
BS1600HS	3P	1400, 1600.	130	100

Note: 1. Standard: IEC 60947-2
 2. Special breaking capacity, please contact sales representative.
 3. BS225SN rated current 250A is optional order.

Index

MCCB
ELCB

ATS

ACB

MCB

SPD

MS

MMS



B. MS Type

Type	ATS Protection Switch	Rated current In (A)	Pole	Voltage
BS-MB	Miniature Circuit Breaker Protection Switch	20A	R, N	110V
			R, T	220V



Air Circuit Breaker

Frame Size		1600AF		2000AF		2500AF		3200AF		4000AF		6300AF		
Model		BW-1600		BW-2000		BWA-2500		BW-3200		BW-4000		BW-6300		
Rated Current, In		400/630/ 800/1000	1250/ 1600	630/ 800/1000	1250/ 1600/2000	400/630/800/ 1000/1250/ 1600/2000	2500	2000/ 2500	3200	4000	5000	6300		
Pole		3P / 4P		3P / 4P		3P / 4P		3P / 4P		3P / 4P		3P / 4P		
Frequency (Hz)		50 / 60HZ		50 / 60HZ		50/60HZ		50 / 60HZ		50 / 60HZ		50 / 60HZ		
Rated Voltage, Ue		AC690V		AC690V		AC 400/415/690V		AC690V		AC690V		AC690V		
Rated Impulse Withstand Voltage, Uimp		12kV		12kV		12kV		12kV		12kV		12kV		
Insulation Voltage, Ui		AC1000V		AC1000V		AC1000V		AC1000V		AC1000V		AC1000V		
Rated Current of Neutral (%)		100%In		100%In		100%In		100%In		100%In		100%In		
Breaking Capacity	Model	SN	HS	HN	H	HS	HN	HS	HN	HS	HN	HS		
	Icu / Ics (kA)	690V	50/50	50/50	55/55	65 / 65	60/50	55/55	60/50	55/55	85/85			
		380/400/415V	65/65	80/50	85/85	85 / 85	100/65	100/100	100/65	100/100	120/100			
		240V	—	80/50	85/85	—	100/65	100/100	100/65	100/100	120/100			
	Icw (kA) 1sec	400/415V	50	50	65	85	65	85	65	85	100			
		690V	50	50	65	65	65	65	65	75	85			
Operating time (ms)	Max. total breaking time	≤ 30		40		40		40		40		40	40	
	Max. closing time	≤ 70		80		80		80		80		80	80	
Endurance	Mechanical	With maintenance	20,000		20,000		15000		20,000		20,000		10,000	10,000
		Without maintenance	15,000		10,000		30000		10,000		10,000		2,500	2,500
	Electrical	With maintenance	10,000	8,000	15,000		8000		13,000		12,000		2,000	2,000
		Without maintenance	10,000	8,000	8,000		6000		6,500		6,000		500	500
Dimension HxWxD (mm)	Fixed Type	3P	312x265x201		402x362x332		—		402x422x332		402x422x377		—	—
		4P	312x335x201		402x455x332		—		402x537x332		402x537x377		—	—
	Drawout Type	3P	345x275x300		430x375x421		435x405x448.5	435x405x473	430x435x421		430x465x466		435x842x505	435x960x505
		4P	345x345x300		430x470x421		435x500x448.5	435x500x473	430x550x421		430x580x466		435x956x492	

Note: Icu/Ics/Icw for HS type only labeled 400V and 690V on the name plate, other voltage are for reference.

Index

MCCB
ELCB

ATS

ACB

MCB

SPD

MS

MMS

MCB (Miniature Circuit Breaker) | BHA Series

Applications:

Applicable to the residential, industrial and commercial power distribution systems, provide circuit-control and protection on equipments against any impacts of overload, short-circuit and earth leakage.

- DIN rail TH 35mm
- Ambient temperature: -5°C ~ +40°C



BHA

• Overload, Short Circuit

BHA	2	2	C	32		
↓	↓	↓	↓	↓		
Type	Rated short-circuit breaking capacity (kA) Rated voltage (V)	Poles (P)	Tripping characteristics	Rated current In (A)	Standard	Mechanical life
BHA	2: 4.5kA; 3: 6kA; 4: 10kA 230/400V	1, 2, 3, 4	C type: 5~ 10In D type: 10~ 15In	1, 2, 3, 4, 5, 6, 10, 16, 20, 25, 32, 40, 50, 63.	IEC 60898	20,000 operations
BHA	125: 10kA 230/240V: 1P 400/415V: 2/3/4P	1, 2, 3, 4	8~12In	80, 100, 125	IEC 60947-2	10,000 operations
BHA	10kA 4: DC125V(1P) / DC250V(2P) 5: DC220V(1P) / DC440V(2P)	1, 2	DC Type	1, 2, 3, 4, 5, 6, 10, 16, 20, 25, 32, 40, 50, 63.	IEC 60947-2	20,000 operations

• BHA5 can't be used in IT system

Index

MCCB
ELCB

ATS

ACB

MCB

SPD

MS

MMS



BHL

• Overload, Short Circuit, Leakage

BHL	2	2	C	32	G
↓	↓	↓	↓	↓	↓
Type	Rated short-circuit breaking capacity (kA) Rated voltage (V)	Poles (P)	Tripping characteristics	Rated current In (A)	Optional function (2P)
BHL	2: 4.5kA 230V: 2P ; 400V: 3P/4P	2, 3, 4	C type: 5~ 10In D type: 10~ 15In	1, 2, 3, 4, 5, 6, 10, 16, 20, 25, 32, 40, 50, 63.	Over-voltage protection (230V, internal built)
BHL	3: 6kA 230/400V	2, 3, 4	C type: 5~ 10In D type: 10~ 15In	1, 2, 3, 4, 5, 6, 10, 16, 20, 25, 32, 40, 50, 63.	Over-voltage protection (230V, internal built)

• Standard: IEC 61009

• Internal OVT over voltage range AC 280V ± 5%



BHL-A

• Overload, Short Current, Leakage

BHL-A	3	1	C	32	A	30	G
↓	↓	↓	↓	↓	↓	↓	↓
Type	Rated short-circuit breaking capacity (kA) Rated voltage (V)	Poles (P)	Tripping characteristics	Rated current In (A)	Residual current type	Rated sensitivity current (mA)	Optional function (2P)
BHL-A	2: 4.5kA; 3: 6kA 230V	1P+N	C type: 5~ 10In D type: 10~ 15In	6, 10, 16, 20, 25, 32, 40, 50, 63	A, AC	10, 30, 100, 300	Over-voltage protection (230V, internal built)



BL-BF

· Overload, Short Current, Leakage

BL-BF	V	15	015	20
↓	↓	↓	↓	↓
Model	Type	Rated current In (A)	Rated sensitivity current IΔn (mA)	Pole
BL-BF	V : RCCB L : RCBO C : MCB	15, 20, 30	000 : N/A (C Type) 015 : 15 (V/L Type) 030 : 30 (V/L Type)	20 : 2P0E (V type) 21 : 2P1E (C type) 22 : 2P2E (L type)



BHR-A

· Residual Current

BHR-A	42	25	A	030
↓	↓	↓	↓	↓
Type	Poles (P)	Rated current In (A)	Residual current Type	Rated sensitivity current IΔn (mA)
BHR-A	42: 2P 44: 4P	25, 32, 40, 63	A, AC	030: 30 100: 100 300: 300

BHG

· Disconnect Switch

BHG		2	32		
↓		↓	↓		
Type	Rated voltage (V)	Poles (P)	Rated current In (A)	Standard	Mechanical life
BHG	230/400V	1, 2, 3, 4	32A, 40A, 63A, 80A, 100A.	IEC 60947-3	50,000 operations



BHN

· N+L Overload, Short Circuit

BHN	2	1	C	32	
↓	↓	↓	↓	↓	
Type	Rated breaking capacity (kA)		Poles (P)	Tripping characteristics	Rated current In (A)
	Rated voltage (V)				
BHN	2: 4.5kA; 3: 6kA 230V		1P+N	C type: 5~ 10In	6, 10, 16, 20, 25, 32.



· Standard: IEC 60898

BHZ

· Over / Under Voltage Protective Device with Auto-reset

BHZ2	25							
↓	↓							
Type	Rated current In (A)	Over voltage		Under voltage		Operation time		Reset
		Operating value	Reset value	Operating value	Reset value	Over voltage	Under voltage	
BHZ2	25, 32, 40, 50, 63	> 275V	255V-265V 260	50V~160V	180V~190V 185	275V: 3-15s 300V: 1-3s 350V: 0.25-0.75s 400V: 0.1-0.2s	0.7s	30s±5s



· Standard: IEC 60898

Index

MCCB
ELCB

ATS

ACB

MCB

SPD

MS

MMS

BHK

· Accessories

BHK	2					1	0							
↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓	↓			
Type	Accessory Code						Installation		Control Voltage					
	1	2	3	4	5	6	1	2	0	1	2	3	4	5
	AL	AX	SHT	UVT	OVT	OUVT	Standard	Option	—	AC220~240V	DC48V	AC24~48V DC12~48V	AC12V	AC230~415V DC110~130V
BHK	AL						○		○					
		AX					○	○	○					
			SHT				○	○				○	○	○
				UVT			○	○		○	○			
					OVT		○	○	○					
					OUVT	○	○	○						

Note: 1. Standard: Attached on left side of breaker
 2. Option: Attached on left side of accessory

Index

MCCB
ELCB

ATS

ACB

MCB

SPD

MS

MMS

Type	Auxiliary Contact		Width (mm)	Product Code
	AC/12			
AL Alarm Switch		1NO, 1NC 230V 6A 440V 3A	9	BHK11
AX Auxiliary Contact		1NO, 1NC 230V 6A 440V 3A	9	BHK21 BHK22

Type	Control Voltage		Width (mm)	Product Code	
	V AC	V DC			
SHT Shunt Trip		12 24-48 230-415	12-48 110-130	18	BHK31 BHK32
UVT Under Voltage Trip		220-240	48	18	BHK41 BHK42

Type	Rated voltage	Current	Over voltage range	Trip time	Width (mm)	Product Code	
OVT Over Voltage Trip		230V	15mA	280V±5%	≅ 0.2S	18	BHK51 BHK52

Surge Protective Device | BHP Series



BHP 20			3P R 320								
Type	I _{max} /I _{imp} (kA)	Waveform (μs)	Pole (P)	Alarm auxiliary contact R: with Blank: without	U _c (V)	U _n (V)	U _p (kV)	Waveform (μs)	I _n (kA)	Connection wire diameter	
										L-N	PE
BHP20	20: 20kA	8/20	1P: 1P 1P1: 1P+1 2P: 2P 3P: 3P 3P1: 3P+1 4P: 4P	R	275 320	230/400	1.1 1.2	8/20	10	≡ 2.5mm ²	≡ 6mm ²
BHP40	40: 40kA	8/20		R	275 385	230/400	1.3 1.8	8/20	20	≡ 4mm ²	≡ 16mm ²
BHP80	80: 80kA	8/20		R	275 385	230/400	1.8 2.1	8/20	40	≡ 10mm ²	≡ 25mm ²
BHP100	100: 100kA	8/20		R	275 385	230/400	2.1 2.3	8/20	60	≡ 16mm ²	≡ 25mm ²
BHP250	250: 25kA	10/350			275 440	230/400	2.3 2.3	10/350	—	≡ 25mm ²	≡ 35mm ²

To enable the surge protective device to work, please read the following note:

1. The grounding system type of the protected device and maximum operating voltage of the power grid U_s. Max.
2. The impulse withstand voltage of the protected device.

Note: 1. BHP20, 40 are plug-in type; BHP80, 100, 250 are fixed type.
2. The standard operation voltage U_c(V) is below table. Max operation voltage U_c(V): 660V.

SPD Counter

Model	TAD-04-99
Rated Voltage	AC85~250V
Max. Count	99
Display	LED
Dimension (mm)	91X69X18

Normal working conditions

- Frequency: the AC power frequency shall be 50/60Hz.
- Voltage: the voltage continuously supplied between the wiring terminals of the surge protective device shall not exceed its maximum continuous operating voltage U_c.
- Altitude: less than 2,000m.
- Use and storage temperature: -Normal range: -5°C ~ +40°C;
-Ultimate range: -40°C ~ +80°C;
- Humidity: Relative humidity 30%~90% under ambient temperature.

Index

MCCB
ELCB

ATS

ACB

MCB

SPD

MS

MMS

Magnetic Contactor / Motor Starter ◆ AC control










Model		9T	11	12T	15		
Type	Magnetic Contactor	Nonreversing	S-P9T	S-P11	S-P12T	S-P15	
		Reversing	S-P2XP9T	S-2xP11	S-P2XP12T	S-2xP15	
	Motor Starter	without enclosure	Nonreversing	MSO-P9T	MSO-P11	MSO-P12T	MSO-P15
			Reversing	MSO-P2XP9T	MSO-2xP11	MSO-P2XP12T	MSO-2xP15
		with enclosure	Nonreversing	MS-P9T	MS-P11	MS-P12T	MS-P15
			Reversing	MS-P2XP9T	MS-2xP11	MS-P2XP12T	MS-2xP15
		with enclosure (push button)	Nonreversing	MS-P9TPB	MS-P11PB	MS-P12TPB	MS-P15PB
	TOR	Standard	TH-P12E	TH-P12 E	TH-P12E	TH-P12 E	
		Differential	TH-P12PP	TH-P12PP	TH-P12PP	TH-P12PP	
	Rated Capacity	IEC 60947-4-1 EN 60947-4-1 DIN VDE 0660	3 Ø	240V	2.5/3/11	3.5/ 4.5/ 13	3.5/4.5/13
380/415V				4/5.5/9	5.5/ 7.5/ 12	5.5/7.5/12	7.5/ 10/ 18
440V				4/5.5/9	5.5/ 7.5/ 12	5.5/7.5/12	7.5/ 10/ 16
550V				4/5.5/7	5.5/ 7.5/ 9	7.5/10/12	7.5/ 10/ 13
660V				4/5.5/6	5.5/ 7.5/ 7	7.5/10/9	7.5/ 10/ 9
AC 3 (kW/HP/A)		Operation current (Ith) AC1 (A)	25	20	25	25	
		Rated insulation voltage (V)	AC690	AC660	AC690	AC660	
UL 508 CSA-C22.2		1 Ø	100~120V	0.5/9.8	0.5/ 9.8	0.75/13.8	—
			200~240V	1.5/10	2/ 10	2/12	—
		3 Ø	200~240V	3/9.6	3/ 9.6	5/15.2	—
			380~480V	5/7.6	7.5/ 11	7.5/11	—
			550~600V	7.5/9	10/ 11	10/11	—
		Operation current (Ith) AC1 (A)	25	24	25	—	
Rated insulation voltage (V)		AC600	AC600	AC600	—		
Auxiliary Contact		IEC 60947-5-1 EN 60947-5-1 GB14048.4	Contact	Standard	1No 1NC	1NO	1No 1NC
	Special			—	1NC	—	1NC
	220V		1.6	1.6	1.6	1.6	
	380V		0.95	0.95	0.95	0.95	
	AC 15	Operation current (Ith) AC1 (A)	16	16	16	16	
		Contact class (UL)	A600, Q300	A600, P600, Q300	A600, Q300	—	
	NEMA		—	0	—	0	
	Electrical Life	AC3	1.6 Mil.	1.6 Mil.	1.6 Mil.	1.3 Mil.	
		AC15	10 Mil.	10 Mil.	10 Mil.	10 Mil.	
	Mechanical Life	AC3	1200	1200	1200	1200	
AC15		1200	1200	1200	1200		
Magnetic Contactor	Weight (kg)	0.34	0.33	0.34	0.33		
	Appearance Dimensions (W×H×D) (mm)	43×81×86	43×81×83.5	43×81×86	43×81×83.5		
	Installation Dimension (mm)						
	Mechanical Interlock	MPU-11	MPU-11	MPU-11	MPU-11		

Magnetic Contactor / Motor Starter ◆ AC control




Model		16	21 (A)	25	30T		
Magnetic Contactor	Nonreversing	S-P16	S-P21 (A)	S-P25	S-P30T		
	Reversing	S-2xP16	S-2xP21 (A)	S-2xP25	S-2xP30T		
Motor Starter	without enclosure	Nonreversing	MSO-P16	MSO-P21 (A)	MSO-P25	MSO-P30T	
		Reversing	MSO-2xP16	MSO-2xP21 (A)	MSO-2xP25	MSO-2xP30T	
	with enclosure	Nonreversing	MS-P16	MS-P21 (A)	MS-P25	MS-P30T	
		Reversing	MS-2xP16	MS-2xP21 (A)	MS-2xP25	MS-2xP30T	
	with enclosure (push button)	Nonreversing	MS-P16PB	MS-P21PB (A)	MS-P25PB	MS-P30TPB	
TOR	Standard	TH-P20 E	TH-P20 E	TH-P20 E(TA)	TH-P20 E(TA)		
	Differential	TH-P20PP	TH-P20PP	TH-P20(TA)PP	TH-P20(TA)PP		
Rated Capacity	IEC 60947-4-1 EN 60947-4-1 DIN VDE 0660	3 Ø	240V	4.5/ 6/ 18	5.5/ 7.5/ 24	6.5/ 8.5/ 26	7.5/ 10/ 30
			380/415V	7.5/ 10/ 18	11/ 15/ 21	12/ 16/ 25	15/ 20/ 30
			440V	7.5/ 10/ 16	11/ 15/ 21	12/ 16/ 23	15/ 20/ 27
			550V	7.5/ 10/ 13	11/ 15/ 17	12/ 16/ 20	15/ 20/ 22
			660V	7.5/ 10/ 9	11/ 15/ 14	12/ 16/ 16	15/ 20/ 18
	AC 3 (kW/HP/A)	Continuous current (Ith) AC1 (A)		30	32	32	50
		Rated insulation voltage (Ui) (V)		AC660	AC660	AC660	AC660
	UL 508 CSA-C22.2	1 Ø	100~120V	1/ 16	2/ 24	2/ 24	2/ 24
			200~240V	3/ 17	3/ 17	3/ 17	5/ 28
		3 Ø	200~240V	5/ 15.2	7.5/ 22	10/ 28	10/ 28
			380~480V	10/ 14	15/ 21	15/ 21	20/ 27
			550~600V	10/ 11	15/ 17	15/ 17	30/ 32
Operation current (Ith) AC1 (A)		30	35	40	50		
Rated insulation voltage (Ui) (V)		AC600	AC600	AC600	AC600		
NEMA		0	1	1	2		
Auxiliary Contact	IEC 60947-5-1 EN 60947-5-1 GB14048.4	Contact	Standard	1NO 1NC	1NO 1NC (2NO 2NC)	1NO 1NC	2NO 2NC
			Special	—	—	—	—
			220V	1.6	1.6	1.6	1.6
			380V	0.95	0.95	0.95	0.95
	AC 15	Continuous current (Ith) AC1 (A)		16	16	16	16
Contact class (UL)		A600, Q300	A600, Q300	A600, Q300	A600, Q300		
Electrical Life AC3		1.3 Mil.	1.3 Mil.	1.3 Mil.	1.3 Mil.		
Mechanical Life		10 Mil.	10 Mil.	10 Mil.	10 Mil.		
Operation (Time/Hour)		1200	1200	1200	1200		
Magnetic Contactor	Weight (kg)		0.37	0.38	0.38	0.55	
	Appearance Dimensions (W×H×D) (mm)		53.5×81×83.5	53.5×81×83.5	53.5×81×83.5	73×95×93	
	Installation Dimension (mm)						
Mechanical Interlock		MPU-21	MPU-21	MPU-21	MPU-11		

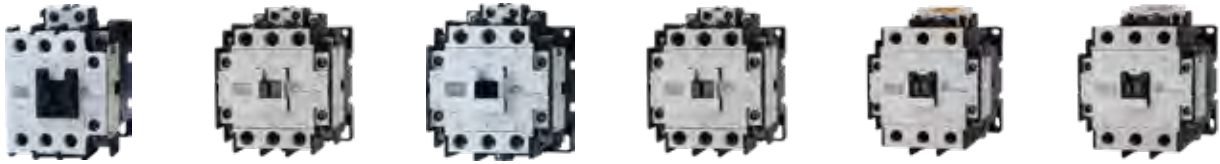

	32T	35T	38T	40T	50T	60T
	S-P32T	S-P35T	S-P38T	S-P40T	S-P50T	S-P60T
	S-2XP32T	S-2XP35T	S-2XP38T	S-2XP40T	S-2XP50T	S-2XP60T
	MSO-P32T	MSO-P35T	MSO-P38T	MSO-P40T	MSO-P50T	MSO-P60T
	MSO-2XP32T	MSO-2XP35T	MSO-2XP38T	MSO-2XP40T	MSO-2XP50T	MSO-2XP60T
	MS-P32T	MS-P35T	MS-P38T	MS-P40T	MS-P50T	MS-P60T
	MS-2XP32T	MS-2XP35T	MS-2XP38T	MS-2XP40T	MS-2XP50T	MS-2XP60T
	MS-P32TPB	MS-P35TPB	MS-P38TPB	MS-P40TPB	MS-P50TPB	MS-P60TPB
	TH-P20 E(TA)	TH-P20 E(TA)	TH-P20 E(TA)	TH-P20 E(TA)	TH-P60 E	TH-P60 E(TA)
	TH-P20(TA)PP	TH-P20(TA)PP	TH-P20(TA)PP	TH-P20(TA)PP	TH-P60PP	TH-P60(TA)PP
	7.5/10/32	9/ 12.5/ 35	11/15/39	11/ 15/ 44	15/ 20/ 58	19/ 25/ 65
	15/20/32	18.5/ 25/ 35	18.5/25/38	22/ 30/ 40	30/ 40/ 52	37/ 50/ 65
	15/20/32	18.5/ 25/ 27	18.5/25/38	22/ 30/ 40	30/ 40/ 52	37/ 50/ 65
	15/20/22	18.5/ 25/ 22	18.5/25/29	22/ 30/ 32	30/ 40/ 41	37/ 50/ 52
	15/20/18	18.5/ 25/ 18	18.5/25/22	22/ 30/ 26	30/ 40/ 34	37/ 50/ 43
	50	50	60	60	80	90
	AC660	AC660	AC660	AC660	AC660	AC660
	—	2/ 24	—	3/ 34	5/ 56	5/ 56
	—	5/ 28	—	7.5/ 40	10/ 50	10/ 50
	—	10/ 28	—	15/ 42	20/ 54	20/ 54
	—	20/ 27	—	20/ 27	30/ 40	40/ 52
	—	30/ 32	—	30/ 32	40/ 41	50/ 52
	—	50	—	60	80	90
	—	AC600	—	AC600	AC600	AC600
	2	2	2	2	2	2
	1NO 1NC	2NO 2NC	2NO 2NC	2NO 2NC	2NO 2NC	2NO 2NC
	—	—	—	—	—	—
	1.6	1.6	1.6	1.6	1.6	1.6
	0.95	0.95	0.95	0.95	0.95	0.95
	16	16	16	16	16	16
	A600, Q300	A600, Q300	A600, Q300	A600, Q300	A600, Q300	A600, Q300
	1.3 Mil.	1.3 Mil.	1.3 Mil.	1.3 Mil.	1.3 Mil.	1.3 Mil.
	10 Mil.	10 Mil.	10 Mil.	10 Mil.	6 Mil.	6 Mil.
	1200	1200	1200	1200	1200	1200
	0.38	0.55	0.55	0.55	1.05	1.05
	53.5x81x83.5	73x95x93	73x95x93	73x95x93	87.9x115x107	87.9x115x107
						
	MPU-21	MPU-11	MPU-11	MPU-11	MPU-11	MPU-11

Magnetic Contactor / Motor Starter ◆ AC control

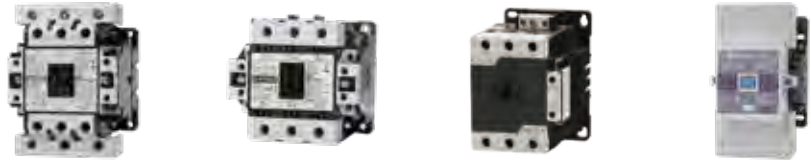

Model		80T	100T	100E	125T		
Type	Magnetic Contactor	Nonreversing	S-P80T	S-P100T	S-P100E	S-P125T	
		Reversing	S-2xP80T	S-2xP100T	S-2xP100E	S-2xP125T	
	Motor Starter	without enclosure	Nonreversing	MSO-P80T	MSO-P100T	MSO-E100	MSO-P125T
			Reversing	MSO-2xP80T	MSO-2xP100T	MSO-2xE100	MSO-2xP125T
		with enclosure	Nonreversing	MS-P80T	MS-P100T	MS-E100	MS-P125T
			Reversing	MS-2xP80T	MS-2xP100T	MS-2xE100	MS-2xP125T
		with enclosure (push button)	Nonreversing	—	—	MS-E100PB	—
	TOR	Standard	TH-P60 E(TA)	TH-P120 E(TA)	TH-E100E	TH-P120 E(TA)	
		Differential	TH-P60(TA)PP	TH-P120(TA)PP	TH-E100PP	TH-P120(TA)PP	
	Rated Capacity	IEC 60947-4-1 EN 60947-4-1 DIN VDE 0660	3 Ø	240V	22/ 30/ 80	30/ 40/ 105	30/ 40/ 105
380/415V				45/ 60/ 80	60/ 80/ 105	55/ 75/ 100	75/ 100/ 130
440V				45/ 60/ 75	60/ 80/ 105	60/ 80/ 100	75/ 100/ 130
550V				45/ 60/ 60	60/ 80/ 85	60/ 80/ 85	75/ 100/ 105
660V				45/ 60/ 50	60/ 80/ 70	60/ 80/ 70	75/ 100/ 90
AC 3 (kW/HP/A)		Continuous current (Ith) AC1 (A)	100	135	135	170	
		Rated insulation voltage (Ui) (V)	AC660	AC660	AC690	AC660	
UL 508 CSA-C22.2		1 Ø	100~120V	7.5/ 80	—	—	—
			200~240V	15/ 68	—	—	—
		3 Ø	200~240V	25/ 68	30/ 80	—	50/ 130
			380~480V	50/ 65	60/ 77	—	100/ 124
			550~600V	60/ 62	60/ 62	—	100/ 99
		Continuous current (Ith) AC1 (A)	90	100	—	170	
		Rated insulation voltage (Ui) (V)	AC600	AC600	—	AC600	
NEMA		3	3	—	3		
Auxiliary Contact	IEC 60947-5-1 EN 60947-5-1 GB14048.4	Contact	Standard	2NO 2NC	2NO 2NC	1NO 1NC	2NO 2NC
			Special	—	—	—	—
			220V	1.6	1.6	3*	3.3
			380V	0.95	0.95	1.9	1.6
	AC 15	Operation current (Ith) AC1 (A)	16	16	10	16	
		Contact class (UL)	A600, Q300	A600, Q300	A600, Q300	A600, Q300	
Electrical Life	AC3	1.2 Mil.	1.2 Mil.	1 Mil.	1.2 Mil.		
Mechanical Life		6 Mil.	6 Mil.	6 Mil.	6 Mil.		
Operation	(Time/Hour)	1200	1200	1200	1200		
Magnetic Contactor	Weight (kg)	1.5	2.35	1.34	2.7		
	Appearance Dimensions (W×H×D) (mm)	100×142×116	120×116×128	85×125×127	106×152.5×140		
	Installation Dimension (mm)						
	Mechanical Interlock	MPU-50	Assembled and adjusted by the factory.	MEU-11	MPU-125		

Note: Mark * means the value is @240V



	150T	200T	220T	300T	400T
	S-P150T	S-P200T	S-P220T	S-P300T	S-P400T
	S-2xP150T	S-2xP200T	S-2xP220T	S-2xP300T	S-2xP400T
	MSO-P150T	MSO-P200T	MSO-P220T	MSO-P300T	MSO-P400T
	MSO-2xP150T	MSO-2xP200T	MSO-2xP220T	MSO-2xP300T	MSO-2xP400T
	MS-P150T	MS-P200T	MS-P220T	—	—
	MS-2xP150T	MS-2xP200T	MS-2xP220T	—	—
	—	—	—	—	—
Index	TH-P120 E(TA)	TH-P220T E	TH-P220T E	TH-P400T E	TH-P400T E
	TH-P120(TA)PP	TH-P220TTPP	TH-P220TTPP	TH-P400TTPP	TH-P400TTPP
	45/ 60/ 165	55/ 75/ 200	65/ 85/ 225	90/ 125/ 300	110/ 150/ 400
MCCB ELCB	90/ 125/ 160	110/ 150/ 190	120/ 160/ 220	160/ 220/ 300	220/ 300/ 400
	90/ 125/ 160	110/ 150/ 190	120/ 160/ 220	185/ 250/ 300	250/ 340/ 400
	90/ 125/ 130	110/ 150/ 150	132/ 180/ 180	185/ 250/ 263	250/ 340/ 360
ATS	90/ 125/ 110	110/ 150/ 125	132/ 180/ 150	200/ 300/ 220	280/ 380/ 305
	200	240	260	350	450
	AC660	AC660	AC660	AC1000	AC1000
ACB	—	—	—	—	—
	60/ 154	75/ 192	75/ 192	100/ 248	125/ 312
	125/ 156	150/ 180	150/ 180	200/ 240	250/ 302
MCB	125/ 125	150/ 144	150/ 144	200/ 192	300/ 289
	200	240	260	350	450
	AC600	AC600	AC600	AC1000	AC1000
SPD	3	4	4	5	5
	2NO 2NC	2NO 2NC	2NO 2NC	2NO 2NC	2NO 2NC
	—	—	—	—	—
MS	3.3	3.3	3.3	3.3	3.3
	1.6	1.6	1.6	1.6	1.6
	16	16	16	10	10
MMS	A600, Q300	A600, Q300	A600, Q300	A600, Q300	A600, Q300
	1.2 Mil.	1.2 Mil.	1.2 Mil.	1.2 Mil.	1.2 Mil.
	6 Mil.	6 Mil.	6 Mil.	6 Mil.	6 Mil.
	1200	1200	1200	1200	1200
	2.7	4.35	4.35	9.75	9.75
	106×152.5×140	138×185×159.5	138×185×159.5	164×246×196.5	164×246×196.5
	MPU-125	MPU-125	MPU-125	MPU-125	MPU-125

Magnetic Contactor / Motor Starter ◆ AC control



Model		630T	800T	1260T		
Magnetic Contactor	Nonreversing	S-P630T	S-P800T	S-P1260T		
	Reversing	S-2XP630T	S-2XP800T	S-2XP1260T		
Type	Motor Starter	without enclosure	Nonreversing	—	—	
			Reversing	—	—	
	with enclosure	Nonreversing	—	—		
		Reversing	—	—		
	with enclosure (push button)	Nonreversing	—	—		
TOR	Standard	TH-P600(E)	TH-P600(E)	—		
	Differential	TH-P600PP	TH-P600PP	—		
Rated Capacity	IEC 60947-4-1 EN 60947-4-1 DIN VDE 0660	3 Ø	240V	200 / 270 / 630	250 / 340 / 800	—
			380/415V	335 / 450 / 630	450 / 610 / 800	—
			440V	400 / 545 / 630	450 / 610 / 800	—
			550V	400 / 545 / 552	450 / 610 / 620	—
			660V	450 / 610 / 450	475 / 645 / 475	—
	AC 3 (kW/HP/A)	Continuous current (Ith) AC1 (A)	800	1000	1260	
		Rated insulation voltage (Ui) (V)	AC1000	AC1000	AC1000	
	UL 508 CSA-C22.2	1 Ø	100~120V	—	—	—
			200~240V	—	—	—
		3 Ø	200~240V	—	—	—
			380~480V	—	—	—
			550~600V	—	—	—
AC3 (HP/A)		Continuous current (Ith) AC1 (A)	—	—	—	
Rated insulation voltage (Ui) (V)	—	—	—			
NEMA		3	3	4		
Auxiliary Contact	IEC 60947-5-1 EN 60947-5-1 GB14048.4	Contact	Standard	2NO 2NC*	2NO 2NC*	—
			Special	—	—	—
			220V	—	—	—
			380V	—	—	—
	AC 15	Operation current (Ith) AC1 (A)	—	—	—	
Contact class (UL)	—	—	—			
Electrical Life	AC3	500000	500000	—		
Mechanical Life		3000000	3000000	3000000		
Operation	(Time/Hour)	—	—	—		
Magnetic Contactor	Weight (kg)	16.4	18.3	18.3		
	Appearance Dimensions (W×H×D) (mm)	309×304×255	309×338×255	309×338×255		
	Installation Dimension (mm)					
Mechanical Interlock		—	—	—		

*Note: S-P630T and S-P800T is equipped with AP-22N (2NO2NC) when ordered, S-P1260T can be purchase separated.

Magnetic Contactor / Motor Starter ◆ AC control

Mini Contactor



Thermal Overload Relay








Model		06	09		
Type	Magnetic Contactor	Nonreversing	S-P06	S-P09	
		Reversing	S-2×P06	S-2×P09	
	Motor Starter	without enclosure	Nonreversing	MSO-P06	MSO-P09
			Reversing	—	—
		with enclosure	Nonreversing	—	—
			Reversing	—	—
	with enclosure (push button)	Nonreversing	—	—	
	TOR	Standard	—	—	
		Differential	TH-P09PP	TH-P09PP	
	Rated Capacity	IEC 60947-4-1 EN 60947-4-1 DIN VDE 0660	3 ∅	240V	1.5/ 2/ 7.5
380/415V				3/ 4/ 6.6	4/ 5.5/ 9
440V				3/ 4/ 6.5	4/ 5.5/ 8.5
550V				3/ 4/ 5	4/ 5.5/ 6.5
660V				3/ 4/ 4	4/ 5.5/ 5
AC 3 (kW/HP/A)			Continuous Current (Ith) AC1 (A)	20	20
UL 508 CSA-C22.2		1 ∅	100~120V	0.25/ 5.8	0.5/ 9.8
			200~240V	1/ 8	1.5/ 10
		3 ∅	200~240V	2/ 6.8	3/ 9.6
			380~480V	3/ 4.8	5/ 7.6
		AC3 (HP/A)	550~600V	3/ 3.9	5/ 6.1
			Continuous Current (Ith) AC1 (A)	20	20
Rated insulation voltage (V)		AC660	AC660		
Auxiliary Contact		NEMA		00	00
		IEC 60947-5-1 EN 60947-5-1 GB14048.4	Contact	Standard	1NO
	Special			1NC	1NC
	220V			3.3	3.3
	380V		1.9	1.9	
	AC 15	Continuous Current (Ith) AC1 (A)	10	10	
		Contact class (UL)	A600	A600	
	Electrical Life AC3		1.6 Mil.	1.6 Mil.	
	Mechanical Life		10 Mil.	10 Mil.	
	Operation (Time/Hour)		1200	1200	
Magnetic Contactor	Weight (kg)	0.15	0.15		
	Appearance Dimensions (W×H×D) (mm)	46×58×51	46×58×51		
	Installation dimension (mm)				
Mechanical Interlock		—	—		

Type	09																							
Standard	Contact Assembled Type	—																						
	Independently Installed Type	—																						
With phase failure protection	Contact Assembled Type	TH-P09PP																						
	Independently Installed Type	—																						
Reset Mode		Manual / Automatic																						
Magnetic Contactor		S-P06, S-P09.																						
TOR Adjustment Range (A)		<table border="1"> <thead> <tr> <th>Rating (A)</th> <th>Range (A)</th> </tr> </thead> <tbody> <tr> <td>0.13</td> <td>0.1~0.16</td> </tr> <tr> <td>0.20</td> <td>0.16~0.24</td> </tr> <tr> <td>0.32</td> <td>0.24~0.4</td> </tr> <tr> <td>0.5</td> <td>0.4~0.6</td> </tr> <tr> <td>0.8</td> <td>0.6~1</td> </tr> <tr> <td>1.3</td> <td>1~1.6</td> </tr> <tr> <td>2.0</td> <td>1.6~2.4</td> </tr> <tr> <td>3.2</td> <td>2.4~4</td> </tr> <tr> <td>5</td> <td>4~6</td> </tr> <tr> <td>7.5</td> <td>6~9</td> </tr> </tbody> </table>	Rating (A)	Range (A)	0.13	0.1~0.16	0.20	0.16~0.24	0.32	0.24~0.4	0.5	0.4~0.6	0.8	0.6~1	1.3	1~1.6	2.0	1.6~2.4	3.2	2.4~4	5	4~6	7.5	6~9
Rating (A)	Range (A)																							
0.13	0.1~0.16																							
0.20	0.16~0.24																							
0.32	0.24~0.4																							
0.5	0.4~0.6																							
0.8	0.6~1																							
1.3	1~1.6																							
2.0	1.6~2.4																							
3.2	2.4~4																							
5	4~6																							
7.5	6~9																							
Auxiliary Contact		1NO 1NC																						
Weight		0.075																						
Dimensions (mm) (W×H×D)		45.5×64.8×50																						

Coil Specification Table

◆ S-P06, S-P09						
Description	AC12V	AC24V	AC48V	AC110V	AC120V	AC220V
Coil rated specifications marking	12V 50Hz	24V 50Hz	48~50V 50Hz	100V 50Hz	110~120V 50Hz	200~220V 50Hz
	12V 60Hz	24V 60Hz	48~50V 60Hz	100~110V 60Hz	115~120V 60Hz	220V 60Hz
Description	AC230V	AC240V	AC380V	AC440V	AC480V	AC550V
Coil rated specifications marking	230V 50Hz	220~240V 50Hz	346~380V 50Hz	400V 50Hz	415~440V 50Hz	500V 50Hz
	230V 60Hz	240~260V 60Hz	380V 60Hz	400~440V 60Hz	460~480V 60Hz	500~550V 60Hz

Magnetic Contactor / Motor Starter ◆ DC control

							
Type	Magnetic Contactor	Nonreversing		SD-P11	SD-P16	SD-P21	
		Reversing		SD-2xP11	SD-2xP16	SD-2xP21	
	Motor Starter	without enclosure	Nonreversing	MDO-P11	MDO-P16	MDO-P21	
			Reversing	MDO-2xP11	MDO-2xP16	MDO-2xP21	
		with enclosure	Nonreversing	—	—	—	
			Reversing	—	—	—	
		with enclosure (push button)	Nonreversing	—	—	—	
	TOR	Standard	TH-P12	TH-P20	TH-P20		
		Differential	TH-P12PP	TH-P20PP	TH-P20PP		
	Rated Capacity	IEC 60947-4-1 EN 60947-4-1 DIN VDE 0660	3 ∅	240V	3.5/ 4.5/ 13	4.5/ 6/ 18	5.5/ 7.5/ 24
380/440V				5.5/ 7.5/ 12	7.5/ 10/ 18	11/ 15/ 21	
550V				5.5/ 7.5/ 9	7.5/ 10/ 13	11/ 15/ 17	
660V				5.5/ 7.5/ 7	7.5/ 10/ 9	11/ 15/ 14	
Continuous current (Ith) AC1 (A)			20	30	32		
UL 508 CSA-C22.2		1 ∅	110~120V	0.5/ 9.8	1/ 16	2/ 24	
			220~240V	2/ 12	3/ 17	3/ 17	
		3 ∅	220~240V	3/ 9.6	5/ 15.2	7.5/ 22	
			440~480V	7.5/ 11	10/ 14	15/ 21	
			550~600V	10/ 11	10/ 11	15/ 17	
Continuous current (Ith) AC1 (A)		24	30	35			
NEMA		0	0	1			
Auxiliary contact		1NO or 1NC		1NO 1NC	1NO 1NC		
Control coil voltage DC (V)				12/ 24/ 30*/ 48/ 72/ 110/ 125/ 220			
Electrical Life		AC3 (10 thousand)	120	120	120		
Mechanical Life	(10 thousand)	600	600	600			
Magnetic Contactor	Weight (kg)		0.33	0.37	0.38		
	Appearance Dimensions (W×H×D) (mm)		43×81×83.5	53.5×81×83.5	53.5×81×83.5		
	Installation Dimension (mm)						
	Mechanical Interlock		MPU-11	MPU-11	MPU-11		

*Note: control circuit voltage 30V can be customized.

Motor Starter

Index

MCCB
ELCB

ATS

ACB

MCB







SPD

MS

MMS

Capacitor Contactors



Type		SC-P12	SC-P16	SC-P20	SC-P25	SC-P33	SC-P45	SC-P60	
Rated Insulation voltage (Ui) (V)		690	690	690	690	690	690	690	
Rated Capacity	IEC 60947-4-1 EN 60947-4-1 DIN VDE 0660 AC 3 (kW/HP/A) AC-6b 3 φ (kVar/A)	200~240V	6.7/ 18	8.5/ 22	10/ 26	15/ 39	20/ 48	25/ 66	35/ 92
		400~440V	12.5/ 16	16.7/ 22	20/ 26	25/ 33	33.3/ 44	45/ 59	60/ 86
		AC 525V	14/15	18/20	23/25	28/31	38/42	48/53	72/79
		660~690V	18/ 15	24/ 20	30/ 25	36/ 30	48/ 40	58/ 49	75/ 63
Continuous current (Ith) AC1 (A)		20	30	40	50	80	90	100	
Auxiliary Contact		2NO or 1NO 1NC	2NO 1NC	2NO 1NC	3NO 2NC	3NO 2NC	3NO 2NC	3NO 2NC	
Auxiliary Contact	IEC 60947-5-1 EN 60947-5-1 AC12 (A)	100~120V	6	6	6	6	6	6	
		200~220V	5	5	5	5	5	5	
		380~440V	3	3	3	3	3	3	
		550~600V	3	3	3	3	3	3	
Continuous current (Ith) (A)		16	16	16	16	16	16	16	
Mechanical Life / Electrical Life (AC-6b) ≦ 440V (10 thousand)		100 / 30	100 / 30	100 / 30	100 / 30	100 / 30	100 / 30	100 / 30	
Operation frequency (time/ hour)		240	240	240	240	240	240	100	
Capacitor unit		AP-40 A	AP-40 A	AP-40 A	AP-40 B	AP-40 B	AP-40 B	AP-40 B	
Magnetic Contactor	Weight (kg)		0.42	0.47	0.47	0.63	1.14	1.14	1.59
	Appearance Dimensions (W×H×D) (mm)		44×108×134	54×112×134	54×112×134	74×185×144	89×185×158	89×185×158	101×195×168
	Installation Dimension (mm)								

Capacitor Unit



Capacitor Unit	Magnetic Contactor	Maximum operating power(kvar)			Max. peak current(A)
		220~240V	400~440V	660~690V	
AP-40-A	S-P11	6.7	12.5	18	560
	S-P16	8.5	16.7	24	560
	S-P21	10	20	30	1250
AP-40-B	S-P40T	15	25	36	1900
	S-P50T	20	33.3	48	2160
	S-P60T	25	45	58	3040
	S-P80T	35	60	75	3040

Thermal Overload Relay



Type		12		18		20			
Standard	Contactor Assembled Type	TH-P12E		TH-P18E		TH-P20E		TH-P20ETA	
	#3 Separate Installed Type	TH-P12ER		TH-P18ER		—		—	
Differential type	Contactor Assembled Type	TH-P12PP		TH-P18PP		TH-P20PP		TH-P20TAPP	
	#3 Separate Installed Type	TH-P12PPR		TH-P18PPR		—		—	
Reset Mode		Manual / Automatic		Manual / Automatic		Manual / Automatic			
Magnetic Contactor		S-P09T, S-P11, S-P12T, S-P15.		S-P16, S-P21		S-P16, S-P21, S-P25, S-P30T, S-P32T, S-P35T, S-P38T, S-P40T.		S-P25, S-P30T, S-P32T, S-P35T, S-P38T, S-P40T.	
TOR Adjustment Range (A)		Rating (A)	Range (A)	Rating	Range	Rating (A)	Range (A)	Rating (A)	Range (A)
		0.25	0.19~0.31	0.25	0.19 - 0.31	0.25	0.19~0.31	28	22~34
		0.4	0.3~0.5	0.4	0.3 - 0.5	0.4	0.3~0.5	33	28~38
		0.6	0.45~0.75	0.6	0.45 - 0.75	0.6	0.45~0.75	40	32~48
		0.9	0.7~1.1	0.9	0.7-1.1	0.9	0.7~1.1		
		1.2	0.9~1.5	1.2	0.9-1.5	1.2	0.9~1.5		
		1.7	1.3~2.1	1.7	1.3-2.1	1.7	1.3~2.1		
		2.1	1.6~2.6	2.1	1.6-2.6	2.1	1.6~2.6		
		3.3	2.5~4.1	3.3	2.5-4.1	3.3	2.5~4.1		
		4.4	3.4~5.4	4.4	3.4-5.4	4.4	3.4~5.4		
		6.5	5~8	6.5	5 - 8	6.5	5~8		
		9	7~11	9	7-11	9	7~11		
		11	9~13	11	9-13	11	9~13		
		*15	12~18	15	12-18	15	12~18		
Auxiliary Contact		1NO 1NC		1NO 1NC		1NO 1NC			
Weight		0.11/0.12		0.15		0.18/0.19		0.20/0.21	
Appearance Dimensions (WxHxD)		TH-P12(PP): 45.5x55.5x78 TH-P12(PP)R: 47x71x86.2		53.5x55.5x78.5		TH-P20(PP): 64.5x46.1x80		TH-P20TA(PP): 64.5x56.2x80	

Index

MCCB
ELCB

ATS

ACB

MCB




SPD

MS



MMS

Installation Dimensions (mm)

TH-P12(PP):
TH-P12(PP)R:



- Note.
1. The purpose of using TOR is protecting load tripping. For protecting circuit, please choose circuit breaker.
 2. When adjusting the rated current; please refer to the TOR range table above. Do not exceed its range.
 3. (E): 3 Elements
 4. *: The rating current of TH-P12 can only use up to "11A" when combined with S-P11.



Magnetic Control Relays



Type		SR-P40	SR-P50	SR-P80
Auxiliary Contact		4NO 3NO 1NC 2NO 2NC	5NO 4NO 1NC 3NO 2NC 2NO 3NC	8NO 7NO 1NC 6NO 2NC 5NO 3NC 4NO 4NC
Rated Capacity IEC 60947-4-1 AC15 (A)	220V	1.6	1.6	1.6
	380V	0.95	0.95	0.95
Rated insulation voltage	(Ui) (V)	660	660	660
Operation current	(Ith) (A)	16	16	16
Contact Class	(UL)	A600, Q300	A600, Q300	A600, Q300
Electrical Life	(10 thousand)	50 and up	50 and up	50 and up
Mechanical Life	(10 thousand)	500	500	500
On/ Off Frequency	(time per / hour)	500	500	500

Definite Purpose Magnetic Contactor | SF Series

Type		20	25	30	35	40
		 C1	 C2	 C3		
Type	1 Pole	SF20C1	SF25C1	SF30C1	SF35C1	SF40C1
	2 Pole	SF20C2	SF25C2	SF30C2	SF35C2	SF40C2
	1Pole w/shunt	SF20C3	SF25C3	SF30C3	SF35C3	SF40C3
Start Current(A) (Per Pole)	AC 240V / AC 277V	120	150	180	180	180
	AC 480V	100	125	150	150	150
	AC 600V	80	100	120	120	120
Start Current(A) (Single Phase) (2 Pole)	AC 240V / AC 277V	120	150	180	210	240
	AC 480V	100	125	150	175	200
	AC 600V	80	100	120	140	160
Rated Current w/resistance load (A)		30	35	40	50	50
Full Rated Current (A)		20	25	30	35	40
Mechanical / Electrical life (10 thousand)		50/25	50/25	50/25	50/25	50/25
Operation frequency (time / hour)		360	360	360	360	360
Coil Control Voltage 50/60 Hz		24 / 110-120 / 200 / 220 / 208-240 / 277				

Index

MCCB
ELCB

ATS

ACB

MCB

SPD

MS

MMS



Star-delta Starter

Model		21	35	50	60	80	100	125	150	220
Type	Without enclosure (no CT)	SDO-P21	SDO-P35	SDO-P50	SDO-P60	SDO-P80	SDO-P100	SDO-P125	SDO-P150	SDO-P220
	Without enclosure (with CT)	SDO-P21T	SDO-P35T	SDO-P50T	SDO-P60T	SDO-P80T	SDO-P100T	SDO-P125T	SDO-P150T	SDO-P220T
	With enclosure (no Ammeter)	SDE-P21	SDE-P35	SDE-P50	SDE-P60	SDE-P80	SDE-P100	SDE-P125	SDE-P150	SDE-P220
	With enclosure (With Ammeter)	SDA-P21	SDA-P35	SDA-P50	SDA-P60	SDA-P80	SDA-P100	SDA-P125	SDA-P150	SDA-P220
Rated Capacity (kW/HP)	200V~220V	11/ 15	19/ 25	22/ 30	30/ 40	37/ 50	45/ 60	55/ 75	75/ 100	110/ 150
	380V~440V	19/ 25	30/ 40	45/ 60	55/ 75	75/ 100	90/ 125	110/ 150	132/ 180	200/ 260
AC Magnetic Contactor	MCM	S-P21	S-P35T	S-P50T	S-P60T	S-P80T	S-P100T	S-P125T	S-P150T	S-P220T
	MCD	S-P21	S-P35T	S-P50T	S-P60T	S-P80T	S-P100T	S-P125T	S-P150T	S-P220T
	MCS	S-P11	S-P16	S-P21	S-P21	S-P35T	S-P35T	S-P50T	S-P50T	S-P60T
Thermal Overload Relay		TH-P20	TH-P60	TH-P60	TH-P120	TH-P120	TH-P120	TH-P220T	TH-P220T	TH-P400T
		TH-P20TA	TH-P60TA	TH-P60TA	TH-P120TA	TH-P120TA	TH-P120TA	TH-P220T	TH-P400T	TH-P400T
Conducting wire size of motor (mm ²)	Line side	2.5~16	2.5~25	2.5~35	2.5~50	10~70	10~95	35~150	35~150	35~240
	Load side	2.5~10	2.5~16	2.5~25	2.5~35	4~50	4~70	10~95	10~90	16~150
	Control side	1~2.5	1~2.5	1~2.5	1~2.5	1~2.5	1~2.5	1~2.5	1~2.5	1~2.5

Index

MCCB
ELCB

ATS

ACB

MCB

SPD



MS

MMS

Push Button | PB Series

Type	PB2	PB3
Contact schema		

External dimensions (mm)

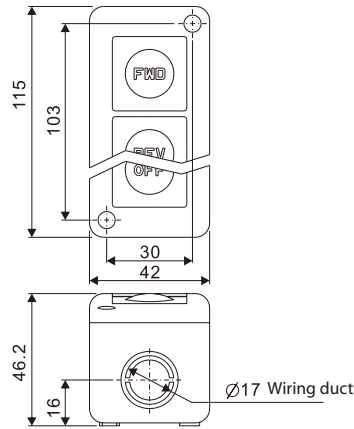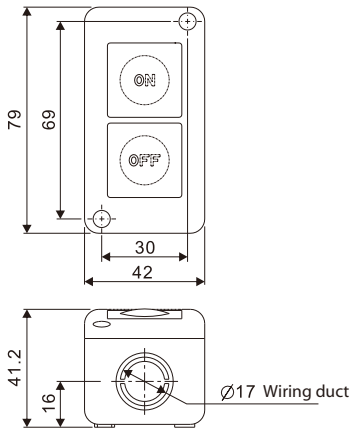

WET. 72.5g

110g

Separate Mounting Unit



BO

44

Type

TOR

UATP12

TH-P12

Auxiliary Contact Block

◆ AP Series



Installation		2P FRONT MOUNTED TYPE						4P FRONT MOUNTED TYPE						
Model		AP-20	AP-11	AP-02	AP-20N	AP-11N	AP-02N	AP-40	AP-31	AP-22	AP-40N	AP-31N	AP-22N	AP-13N
Contact		2NO	1NO 1NC	2NC	2NO	1NO 1NC	2NC	4NO	3NO 1NC	2NO 2NC	4NO	3NO 1NC	2NO 2NC	1NO 3NC
Applicable contactor		SR-P40, SR-P50 S-P09T~S-P80T SD-P11~SD-P21			S-P100E S-P100T S-P630T~S-P1260T			SR-P40, SR-P50 S-P09T~S-P80T SD-P11~SD-P21			S-P100E S-P100T S-P630T~S-P1260T			
Rated Capacity AC 15 (A)	220V	1.6			3			1.6			3			
	380V	0.95			1.9			0.95			1.9			
Operation current	(Ith) (A)	16			10			16			10			

Auxiliary Contact Block

◆ AP Series



Installation		SIDE MOUNTED TYPE	
Model		APS-11	APL-11
Contact		1NO 1NC	1NO 1NC
Applicable contactor		SR-P40, SR-P50 S-P09T~S-P60T SD-P11~SD-P21	S-P125, S-P150T S-P200T, S-P220T S-P300T, S-P400T
Rated Capacity AC 15 (A)	220V	1.6	
	380V	0.95	
Operation current	(Ith) (A)	16	

Auxiliary Contact Block

◆ MAP Series

Installation		2P FRONT MOUNTED TYPE			4P FRONT MOUNTED TYPE		
Model		MAP-20	MAP-11	MAP-02	MAP-40	MAP-31	MAP-22
Contact		2NO	1NO 1NC	2NC	4NO	3NO 1NC	2NO 2NC
Applicable contactor		S-P06, S-P09.					
Rated Capacity AC 15 (A)	220V	3.3					
	380V	1.9					
Operation current	(Ith) (A)	10					



Timer

Model		PTR-30	PRT-30F	PTR-180	PRT-180F
Delay type		On Delay	Off Delay	On Delay	Off Delay
Ajustable time (Sec)		0~30		0~180	
Rated Capacity AC 15 (A)	220V	1.6			
	380V	0.95			
Operation current (Ith) (A)		16			
Applicable contactor		SR-P40, SR-P50, S-P09T~60T, SD-P11~21			

Index

MCCB
ELCB

ATS

ACB

MCB

SPD

MS

MMS



Surge unit

Model	BMSACW220V	BMSACW380V
Applicable contactor	SR-P40, SR-P50, S-P09T~ S-P60T.	

Mechanical Interlock

Model	MPU-11	MPU-21	MPU-50
Applicable contactor	S-P11/S-P15/S-P35T~60T	S-P12/S-P16~30T	S-P80T

Coil Characteristics

Model	S-P06 S-P09	S-P09T S-P12T	S-P11 S-P15	S-P16 S-P21 S-P25 S-P30T S-P32T	S-P35T S-P38T S-P40T	S-P50T S-P60T S-P80T	S-P100T	S-P125T S-P150T	S-P200T S-P220T	S-P300T S-P400T	S-P630T	S-P800T S-P1260T
	Coil Capacity (VA)	Impulse: 25 Operation: 5	55 11	55 11	55 11	72 12	250 28	319 36	370 42	440 50	700 50	1400 32
Power Consumption (W)	1.6	2.5	2.5	2.5	3	7	11	10	12	7	5	5
Operation Vot. (Ue)	On	55~70%	55~68%	55~68%	59~70%	60~75%	63~75%	65~75%	75~80%	75~80%	65~80%	65~80%
	Off	35~50%	34~48%	34~48%	36~52%	40~57%	40~57%	40~55%	40~55%	40~60%	20~50%	20~50%
Close Time (ms)	Aux. OFF	5-12	6~14	5-12	6-14	6-13	6-13	18-28	9-20	10-19	22-37	40-58
	Aux. ON	6-15	10~18	10-18	10-18	12-20	12-20	22-32	15-24	17-25	25-40	40-60
	Contact ON	6-15	10~18	10-18	10-18	12-20	12-20	22-32	10-20	12-27	30-45	42-62
Open Time (ms)	Aux. OFF	6-15	9~19	12-20	9-19	10-17	10-17	50-100	9-18	10-20	40-60	65-85
	Aux. ON	5-12	6~15	8-15	6-14	5-12	5-12	48-98	7-15	7-18	31-51	63-83
	Contact ON	5-12	8~15	8-15	6-14	5-12	5-12	46-96	7-15	7-20	30-50	65-85

Coil Specifications Table

◆ S-P09T~S-P25, S-P30T~P220T, SR-P40~P80, SC-P12~P60						
Description	AC12V	AC24V	AC48V	AC110V	AC120V	AC220V
Coil rated specifications marking	12V 50Hz 12V 60Hz	24V 50Hz 24V 60Hz	48~50V 50Hz 48~50V 60Hz	100V 50Hz 100~110V 60Hz	110~120V 50Hz 115~120V 60Hz	200~220V 50Hz 220V 60Hz
Description	AC230V	AC240V	AC380V	AC440V	AC480V	AC550V
Coil rated specifications marking	230V 50Hz 230V 60Hz	220~240V 50Hz 240~260V 60Hz	346~380V 50Hz 380V 60Hz	400V 50Hz 400~440V 60Hz	415~440V 50Hz 460~480V 60Hz	500V 50Hz 500~550V 60Hz

*Note: Control voltage of SR-P40 can be customized DC 12/24/30/48/72/110/125/220V."

◆ S-P300T~P400T					
Description	AC48V	AC100V	AC220V	AC380V	AC550V
Coil rated specifications marking	AC 48~50V 50/60Hz DC 48V	AC 100~127V 50/60Hz DC 100~127V	AC 220~250V 50/60Hz DC 200~250V	AC 265~450V 50/60Hz	AC 440~575V 50/60Hz

◆ S-P630T~S-P1260T			
Description	AC110V	AC220V	AC380V
Coil rated specifications marking	AC 100~127V 50/60Hz DC 100~127V	AC 200~250V 50/60Hz DC 200~250V	AC 380~440V 50/60Hz

Selection Table ◆ Direct On-Line Starter

Motor rated capacity kW (HP)		3 φ 200V~220V		Heating element rating (A)		Selection of the contactor			
		Heating element rating (A)	Selection of the contactor						
0.016	(1/47)	0.13A	0.1~0.16A	S-P06	S-P09				
0.025	(1/30)	0.2A	0.16~0.24A						
0.04	(1/19)	0.32A	0.24~0.4A						
0.09	(1/8)	0.5A	0.4~0.6A						
0.12	(1/6)	0.8A	0.6~1.0A						
0.25	(1/3)	1.3A	1.0~1.6A						
0.37	(1/2)	2.0A	1.6~2.4A						
0.75	(1)	3.2A	2.4~4.0A						
1.1	(1 1/2)	5A	4.0~6.0A	S-P09T, S-P11, S-P12T	S-P15, S-P16				
1.5	(2)	7.5A	6.0~9.0A						
0.03	(1/25)	0.25A	0.19~0.31A			S-P21	S-P25		
0.05	(1/15)	0.4A	0.3~0.5A						
0.1	(1/8)	0.6A	0.45~0.75A			S-P30T, S-P32T	S-P35T, S-P38T		
0.15	(1/5)	0.9A	0.7~1.1A						
0.2	(1/4)	1.2A	0.9~1.5A			S-P40T			
0.3	(2/5)	1.7A	1.3~2.1A						
0.4	(1/2)	2.1A	1.6~2.6A			S-P50T			
0.75	(1)	3.3A	2.5~4.1A						
1.1	(1 1/2)	4.4A	3.4~5.4A			S-P60T			
1.5	(2)	6.5A	5~8A						
2.2	(3)	9A	7~11A	S-P80T					
3	(4)	11A	9~13A						
3.7	(5)	15A	12~18A	S-P100T					
5.5	(7 1/2)	21A	17~24A						
6.5	(8 1/2)	28A	22~34A	S-P125T					
7.5	(10)	28A	22~34A						
9	(12 1/2)	33A	28~38A	S-P150T					
11	(15)	40A	32~48A						
15	(20)	54A	43~65A	S-P200T					
19	(25)	67A	54~80A						
22	(30)	80A	60~100A	S-P220T					
25	(35)	105A	80~130A						
30	(40)	105A	80~130A	S-P300T					
37	(50)	130A	100~160A						
45	(60)	160A	120~200A	S-P400T					
55	(75)	200A	150~250A						
65	(85)	200A	150~250A	M-600C					
75	(100)	260A	200~320A						
90	(125)	350A	260~440A						
110	(150)	350A	260~440A						
132	(180)	500A	400~600A						
160	(220)	500A	400~600A						

- Motor Starter
- Index
- MCCB
ELCB
- ATS
- ACB
- MCB
- SPD
- MS
- MMS

Selection Table ◆ Direct On-Line Starter

Motor rated capacity kW (HP)		3 φ 380V~440V										
		Heating element rating (A)		Selection of the contactor								
0.025	(1/30)	0.13A	0.1~0.16A	S-P06	S-P09							
0.04	(1/19)	0.2A	0.16~0.24A									
0.09	(1/8)	0.32A	0.24~0.4A									
0.18	(1/4)	0.5A	0.4~0.6A									
0.25	(1/3)	0.8A	0.6~1.0A									
0.37	(1/2)	1.3A	1.0~1.6A									
0.55	(3/4)	2.0A	1.6~2.4A									
0.75	(1)											
1.1	(1 1/2)	3.2A	2.4~4.0A									
1.5	(2)											
2.2	(3)	5A	4.0~6.0A									
3	(4)	7.5A	6.0~9.0A									
0.05	(1/15)	0.25A	0.19~0.31A	S-P09T, S-P11, S-P12T	S-P15, S-P16	S-P21	S-P25	S-P30T, S-P32T	S-P35T, S-P38T	S-P40T		
0.1	(1/8)	0.4A	0.3~0.5A									
0.2	(1/4)	0.6A	0.45~0.75A									
0.3	(2/5)	0.9A	0.7~1.1A									
0.4	(1/2)	1.2A	0.9~1.5A									
0.75	(1)	1.7A	1.3~2.1A									
1.1	(1 1/2)	2.1A	1.6~2.6A									
1.5	(2)	3.3A	2.5~4.1A									
2.2	(3)	4.4A	3.4~5.4A									
3	(4)	6.5A	5~8A									
3.7	(5)	9A	7~11A									
4	(5 1/2)											
4.5	(6)	11A	9~13A									
5.5	(7 1/2)											
7.5	(10)	15A	12~18A									
11	(15)	21A	17~24A									
12	(16)											
15	(20)	28A	22~34A									
19	(25)	33A	28~38A									
22	(30)											
25	(35)	40A	32~48A									
30	(40)	54A	43~65A									
37	(50)	67A	54~80A									
45	(60)											
50	(70)	80A	60~100A									
60	(80)	105A	80~130A									
75	(100)	130A	100~160A									
90	(125)	160A	120~200A									
110	(150)											
132	(180)	200A	150~250A									
150	(200)	260A	200~320A									
160	(220)											
220	(330)	350A	260~440A									
250	(350)											
315	(420)	500A	400~600A									

Index

MCCB
ELCB

ATS

ACB

MCB

SPD

MS

MMS

Selection Table ◆ Direct On-Line Starter

Motor rated capacity kW (HP)		3 φ 500V~550V		Heating element rating (A)		Selection of the contactor												
		Heating element rating (A)	Selection of the contactor															
0.06	(1/12)	0.13A	0.1~0.16A	S-P06	S-P09													
0.09	(1/8)	0.2A	0.16~0.24A															
0.12	(1/6)	0.32A	0.24~0.4A															
0.18	(1/4)	0.5A	0.4~0.6A															
0.37	(1/2)	0.8A	0.6~1.0A															
0.55	(3/4)	1.3A	1.0~1.6A															
0.75	(1)	2.0A	1.6~2.4A															
1.1	(1 1/2)	3.2A	2.4~4.0A															
1.5	(2)	5A	4.0~6.0A															
2.2	(3)	7.5A	6.0~9.0A															
3	(4)																	
4	(5 1/2)																	
0.12	(1/6)	0.25A	0.19~0.31A	S-P09T, S-P11, S-P12T	S-P15, S-P16	S-P21	S-P25	S-P30T, S-P32T	S-P35T, S-P38T	S-P40T								
0.18	(1/4)	0.4A	0.3~0.5A															
0.25	(1/3)	0.6A	0.45~0.75A															
0.37	(1/2)	0.9A	0.7~1.1A															
0.55	(3/4)	1.2A	0.9~1.5A															
0.75	(1)	1.7A	1.3~2.1A															
1.1	(1 1/2)	2.1A	1.6~2.6A															
1.5	(2)	3.3A	2.5~4.1A															
2.2	(3)	4.4A	3.4~5.4A															
4	(5 1/2)	6.5A	5~8A															
4.5	(6)	9A	7~11A															
5.5	(7 1/2)	11A	9~13A															
7.5	(10)																	
11	(15)	15A	12~18A															
12	(16)																	
15	(20)	21A	17~24A															
19	(25)	28A	22~34A															
22	(30)	33A	28~38A															
30	(40)	40A	32~48A															
37	(50)	54A	43~65A															
45	(60)																	
50	(70)	67A	54~80A															
60	(80)	80A	60~100A															
75	(100)	105A	80~130A															
90	(125)	130A	100~160A															
110	(150)																	
132	(180)	160A	120~200A															
150	(200)	200A	150~250A															
160	(220)	260A	200~320A															
220	(330)	350A	260~440A															
315	(420)	500A	400~600A															

Motor Starter

Index

MCCB
ELCB

ATS

ACB

MCB

SPD

MS

MMS

Selection Table ◆ λ-Δ Starter

Heater selection table (A)	Motor output kW (HP)				TH selection of λ-Δ Starter																	
	A		B		21		35		50		60		80		100		125		150		220	
	200~220V		380~440V		A	B	A	B	A	B	A	B	A	B	A	B	A	B	A	B	A	B
6.5	1.5	(2)	3	(4)	TH-P20	TH-P20																
9	1.9	(2 1/2)	3.7	(5)																		
9	2.2	(3)	4.5	(6)																		
11	3	(4)	5.5	(7 1/2)																		
15	3.7	(5)	7.5	(10)																		
15	4.5	(6)	10	(13)																		
21	5.5	(7 1/2)	11	(15)	TH-P20TA	TH-P20TA																
28	6.5	(8)	14	(19)																		
28	7.5	(10)	15	(20)																		
33	9	(12 1/2)	19	(25)																		
40	11	(15)	22	(30)																		
40	14	(19)	26	(35)																		
54	15	(20)	30	(40)	TH-P60	TH-P60	TH-P60	TH-P60	TH-P60	TH-P60	TH-P120	TH-P120	TH-P120	TH-P120	TH-P120	TH-P120	TH-P120	TH-P120	TH-P120	TH-P120	TH-P120	TH-P120
67	19	(25)	37	(50)																		
80	22	(30)	45	(60)																		
80	25	(34)	50	(67)																		
105	30	(40)	55	(75)																		
130	37	(50)	75	(100)																		
160	45	(60)	90	(125)	TH-P60TA	TH-P60TA																
200	55	(75)	110	(150)																		
200	65	(85)	132	(200)																		
260	75	(100)	150	(200)																		
350	110	(150)	200	(260)																		

Index

MCCB
ELCB

ATS

ACB

MCB

SPD

MS

MMS

Modular Contactor



Model	Modular Contactors	Standard	SMC16-S		SMC25-S		SMC40-S		SMC63-S	
		Manual	SMC16-M		SMC25-M		SMC40-M		SMC63-M	
		Pole	2P	4P	2P	4P	2P	4P	2P	4P
Rated insulation voltage (Ui) IEC	(V)	500	500	500	500	500	500	500	500	500
Rated operational voltage (Ue) IEC / UL	(V)	230	400	250	400	250	400	250	400	400
Rated impulse withstand voltage (Uimp) IEC	(kV)	4	4	4	4	4	4	4	4	4
Rated operational current	AC-7a (A)	16	16	25	25	40	40	63	63	63
	AC-7b (A)	6	6	8.5	8.5	15	15	20	20	20
Continuous Current (Ith)	(A)	25	25	25	25	63	63	63	63	63
Mechanical Life (Thousand)	(Thousand)	100								
Electrical Life AC-7a (Thousand)	(Thousand)	10								
IP Level	—	IP20								

Accessory

- Side mount auxiliary contacts



Model	Contacts	Voltage
smAX11	1NO1NC	500V

- 9mm spacing block



Model	Usage
smSB	When modular contactor is installed in distribution box, attach spacing block on both side of the contactor for heat radiation

Index

MCCB
ELCB

ATS

ACB



MCB

SPD


MS

MMS

MANUAL MOTOR STARTER



Power factor AC-3		Rated current In (A)	Overload adjustable range Ie (A)	Tripping current (A) Id ± 20%	Type	
220V (kW)	400V (kW)				Button	Rotary
—	—	0.16	0.1-0.16	1.92	MR-32S-0.16	MR-32R-0.16
—	—	0.25	0.16-0.25	3	MR-32S-0.25	MR-32R-0.25
—	—	0.4	0.25-0.4	4.8	MR-32S-0.4	MR-32R-0.4
—	—	0.63	0.4-0.63	7.56	MR-32S-0.63	MR-32R-0.63
—	—	1	0.63-1	12	MR-32S-1	MR-32R-1
—	0.37	1.6	1-1.6	19.2	MR-32S-1.6	MR-32R-1.6
0.37	0.75	2.5	1.6-2.5	30	MR-32S-2.5	MR-32R-2.5
0.55	1.5	4	2.5-4	48	MR-32S-4	MR-32R-4
1.1	2.2	6.3	4-6.3	75.6	MR-32S-6.3	MR-32R-6.3
2.2	4	10	6-10	120	MR-32S-10	MR-32R-10
2.2	5.5	14	9-14	168	MR-32S-14	MR-32R-14
3.7	7.5	18	13-18	216	MR-32S-18	MR-32R-18
5.5	11	23	17-23	276	MR-32S-23	MR-32R-23
5.5	11	25	20-25	300	MR-32S-25	MR-32R-25
7.5	15	32	24-32	384	MR-32S-32	MR-32R-32
3	5.5	13	9-13	182	—	MR-65R-13
4	7.5	18	12-18	252	—	MR-65R-18
5.5	11	25	17-25	350	—	MR-65R-25
7.5	15	32	23-32	448	—	MR-65R-32
7.5	18.5	40	30-40	560	—	MR-65R-40
11	22	50	37-50	700	—	MR-65R-50
15	30	65	48-65	910	—	MR-65R-65

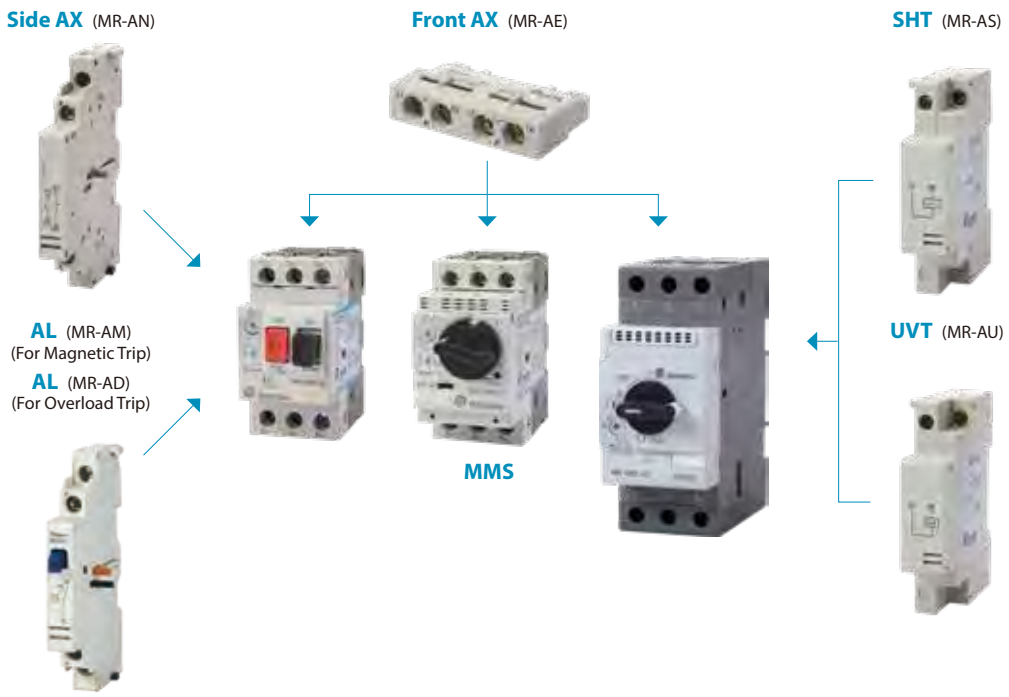




CIRCUIT BREAKER (MCCB / ELCB / EMCCB / MCB)

Breaker & Switchgear System



AIR CIRCUIT BREAKER

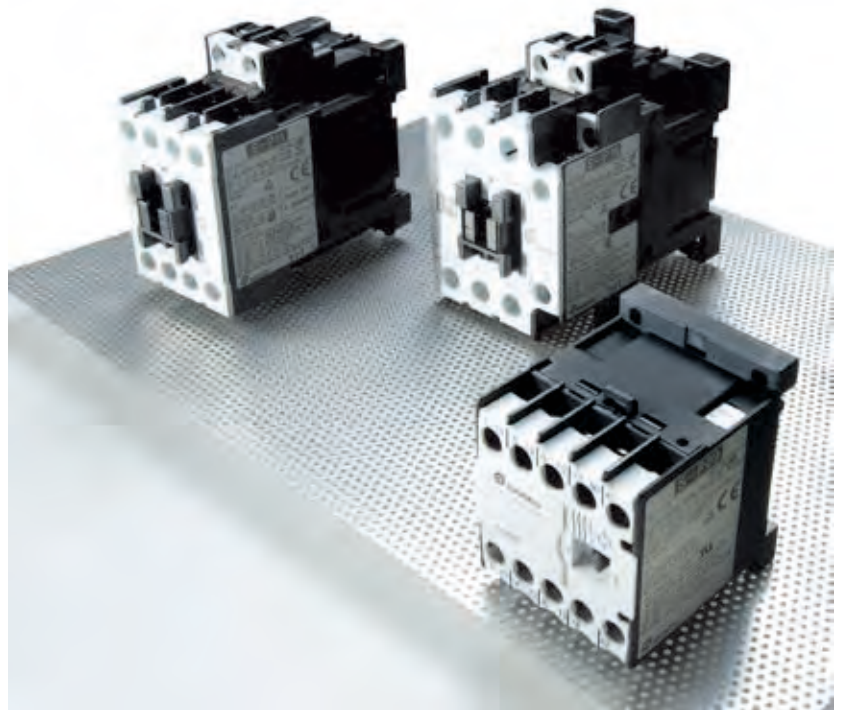

MAGNETIC CONTACTOR / SWITCH (CONTACTOR / MS / MMS)



AUTOMATIC TRANSFER SWITCHES



SURGE PROTECTIVE DEVICE



SMART METER



INVERTER



LOW VOLTAGE POWER CAPACITORS

SHIHLIN ELECTRIC & ENGINEERING

MAGNETIC CONTACTOR / SWITCH (CONTACTOR/ MS/ MMS), CIRCUIT BREAKER (MCCB/ ELCB/ EMCCB/ MCB), AIR CIRCUIT BREAKER, AUTOMATIC TRANSFER SWITCHES, SURGE PROTECTIVE DEVICE, SMART METER, LOW VOLTAGE POWER CAPACITORS, INVERTER



Breaker & switchgears overseas sales dept.

3F, No.9, Sec. 1, Chang-an E. Rd., Zhongshan Dist., Taipei City 10441, Taiwan

T. +886-2-2541-9822 F. +886-2-2581-2665

e-mail. b.export@seec.com.tw


<http://circuit-breaker.seec.com.tw>

Headquarters

16F, No.88, Sec. 6, Zhongshan N. Rd., Shilin Dist., Taipei City 11155, Taiwan

T. +886-2-2834-2662 F. +886-2-2836-6187

<http://www.seec.com.tw>

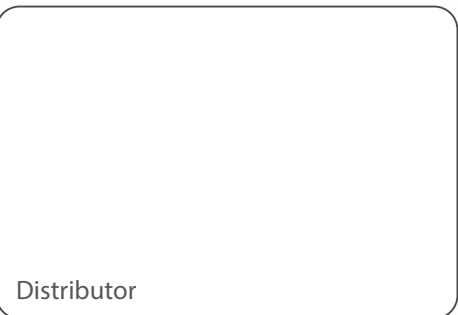

Distributor

B201202E.ALL-BO